


OFFICIAL QUOTE

75KVA 110 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



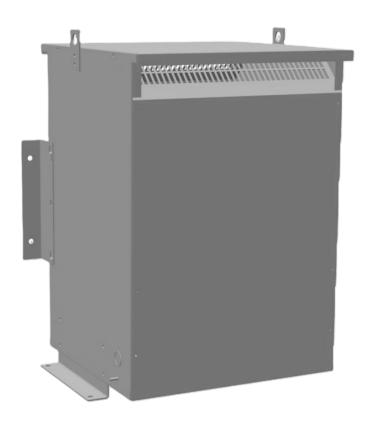

75KVA 110 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

\$4,801.90 CAD

Three Phase Autotransformer with a capacity of 75kVA, transforming 110Y Volts to 208Y Volts

SKU: RC75A2-B

Categories: Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Autotransformer with a capacity of 75kVA, transforming 110Y Volts to 208Y Volts



OFFICIAL QUOTE



75KVA 110 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 271 lbs |
| Phases | <u>3</u> |
| kVA | <u>75</u> |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 110 |
| Primary Max Current | 393.6A |
| Primary Markings | <u>X1-X2-X3</u> |
| Primary Terminals | <u>Pads</u> |
| Secondary Voltage | 208 |
| Secondary Max Current | 208.2A |
| Secondary Markings | H1-H2-H3 |
| Secondary Terminals | 600MCM-2 |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Insulation Class | 220°C (Class H) |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>1.5 – 3.5%</u> |
| Sound (db) | <u>45</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-6</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |



OFFICIAL QUOTE

75KVA 110 VOLTS TO 208 VOLTS THREE PHASE AUTOTRANSFORMER



| Country/Manufacturer | <u>Canada/RPM</u> |
|----------------------|-------------------|
|----------------------|-------------------|