


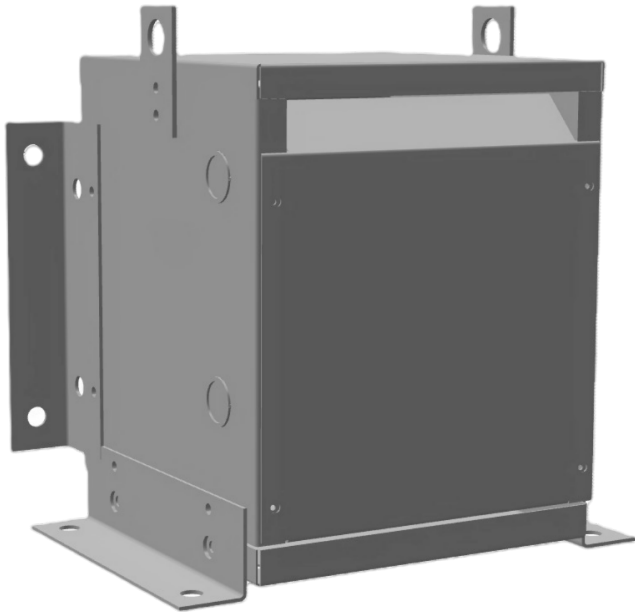

75KVA 380 VOLTS TO 347 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$1,668.20 CAD

Single Phase Autotransformer with a capacity of 75kVA, transforming 380 Volts to 347 Volts

SKU: MC75F-E

Categories: [Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

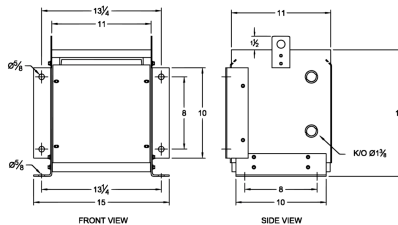

Single Phase Autotransformer with a capacity of 75kVA, transforming 380 Volts to 347 Volts



PRODUCT SPECIFICATIONS

Weight	104.2 lbs
Phases	1
kVA	75
Connection	1PhA-NT-1
Primary Voltage	380
Primary Max Current	114A
Primary Markings	H0-H1
Primary Terminals	300MCM-6
Secondary Voltage	347
Secondary Max Current	124.8A
Secondary Markings	X0-X1
Secondary Terminals	300MCM-6
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	E1-2
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

75KVA 380 VOLTS TO 347 VOLTS

SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------