



75KVA 400 VOLTS TO 416 VOLTS SINGLE PHASE AUTOTRANSFORMER



\$1,110.60 CAD

Single Phase Autotransformer with a capacity of
75kVA, transforming 400 Volts to 416 Volts

SKU: MC75G1-G

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

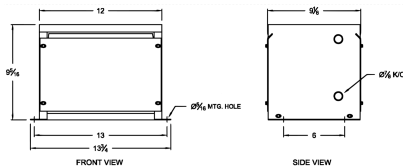

Single Phase Autotransformer with a capacity of 75kVA, transforming 400 Volts to 416 Volts



PRODUCT SPECIFICATIONS

Weight	78.3 lbs
Phases	1
kVA	75
Connection	1PhA-NT-1
Primary Voltage	400
Primary Max Current	108.3A
Primary Markings	X0-X1
Primary Terminals	#2/0-6 AWG
Secondary Voltage	416
Secondary Max Current	104.1A
Secondary Markings	H0-H1
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	180°C (Class F)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	40 dB
Enclosure Type	NEMA 1
Enclosure Size	E1-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

75KVA 400 VOLTS TO 416 VOLTS

SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------