




**75KVA 440 VOLTS TO 115 VOLTS
THREE PHASE AUTOTRANSFORMER**

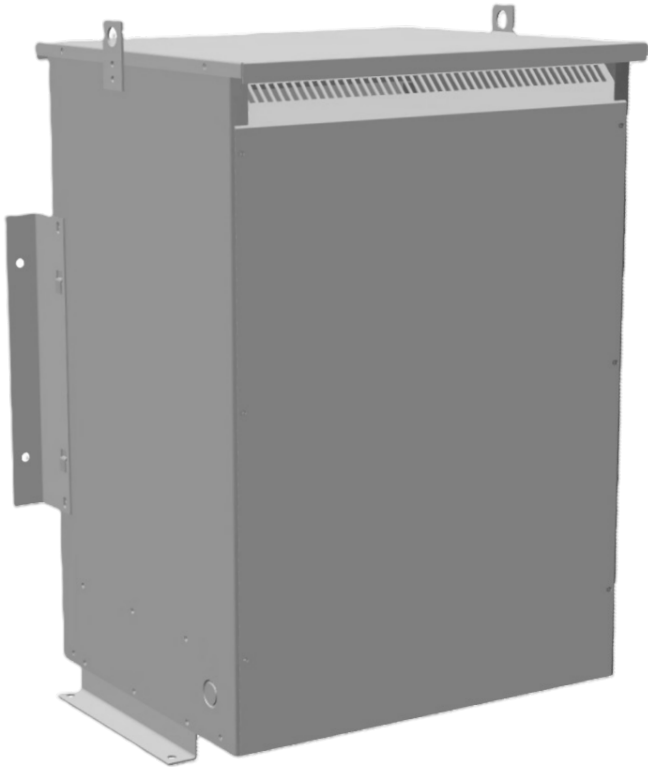

**75KVA 440 VOLTS TO 115
VOLTS THREE PHASE
AUTOTRANSFORMER**



\$7,644.90 CAD

Three Phase Autotransformer with a capacity of 75kVA, transforming 440Y Volts to 115Y Volts

SKU: RC75H2-A1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

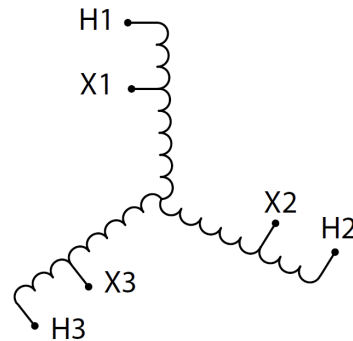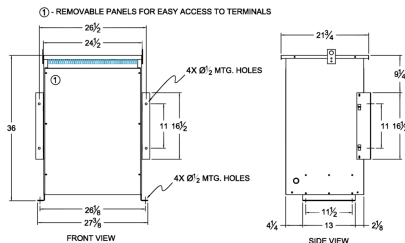

Three Phase Autotransformer with a capacity of 75kVA, transforming 440Y Volts to 115Y Volts



PRODUCT SPECIFICATIONS

Weight	454 lbs
Phases	3
kVA	75
Connection	3PhA-NT-1
Primary Voltage	440
Primary Max Current	98.4A
Primary Markings	H1-H2-H3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	115
Secondary Max Current	376.5A
Secondary Markings	X1-X2-X3
Secondary Terminals	Pads
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	2.5 – 4.5%
Sound (db)	55
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-7
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE
75KVA 440 VOLTS TO 115 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer	Canada/RPM
----------------------	----------------------------