




OFFICIAL QUOTE

75KVA 575 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER

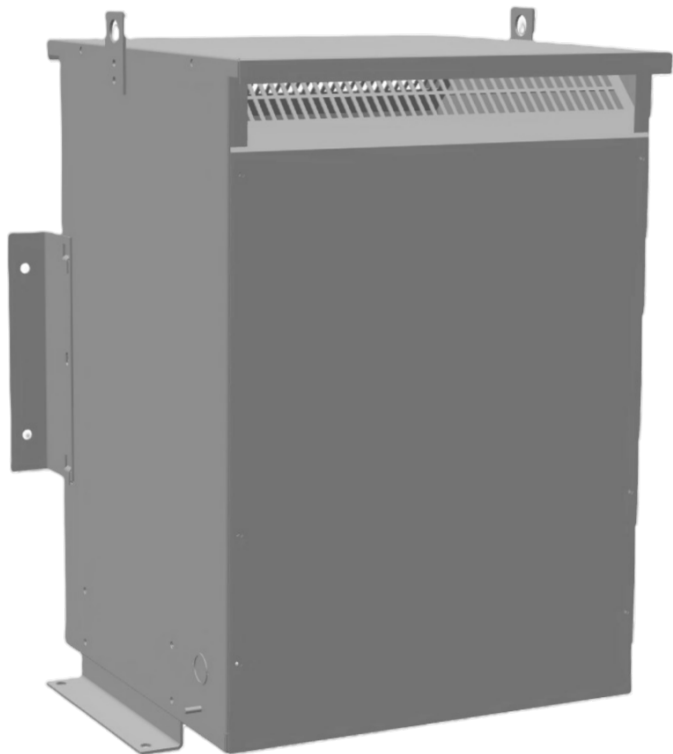

75KVA 575 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



\$3,612.40 CAD

Three Phase Autotransformer with a capacity of 75kVA, transforming 575Y Volts to 400Y Volts

SKU: RC75J1-G1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

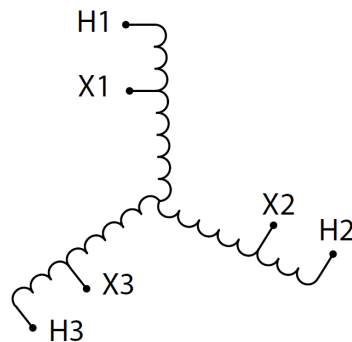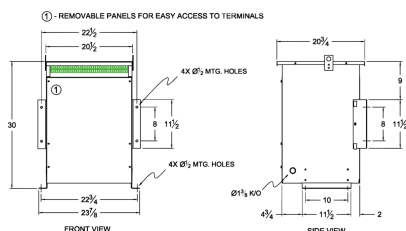

Three Phase Autotransformer with a capacity of 75kVA, transforming 575Y Volts to 400Y Volts



OFFICIAL QUOTE

75KVA 575 VOLTS TO 400 VOLTS THREE PHASE AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	197 lbs
Phases	3
kVA	75
Connection	3PhA-NT-1
Primary Voltage	575
Primary Max Current	75.3A
Primary Markings	H1-H2-H3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	400
Secondary Max Current	108.3A
Secondary Markings	X1-X2-X3
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Copper
Insulation Class	220°C (Class H)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.0 – 3.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-6
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered



OFFICIAL QUOTE

75KVA 575 VOLTS TO 400 VOLTS
THREE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)