




OFFICIAL QUOTE

75KVA 575 VOLTS TO 460 VOLTS  
SINGLE PHASE AUTOTRANSFORMER

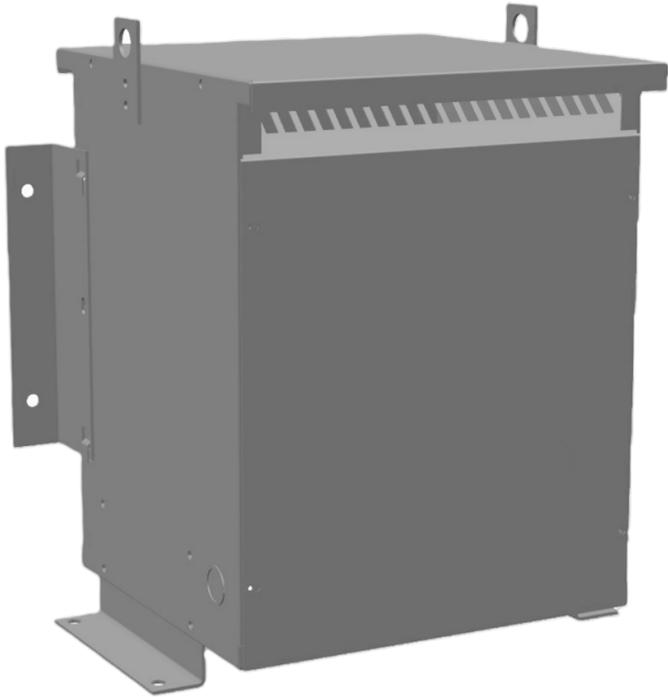

75KVA 575 VOLTS TO 460  
VOLTS SINGLE PHASE  
AUTOTRANSFORMER


**\$2,673.00 CAD**

Single Phase Autotransformer with a capacity of 75kVA, transforming 575 Volts to 460 Volts

SKU: MC75J1-H1

Categories: [Autotransformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES



Single Phase Autotransformer with a capacity of 75kVA, transforming 575 Volts to 460 Volts



## OFFICIAL QUOTE

### 75KVA 575 VOLTS TO 460 VOLTS SINGLE PHASE AUTOTRANSFORMER



#### PRODUCT SPECIFICATIONS

<b>Weight</b>	164.7 lbs
<b>Phases</b>	<a href="#">1</a>
<b>kVA</b>	<a href="#">75</a>
<b>Connection</b>	<a href="#">1PhA-NT-1</a>
<b>Primary Voltage</b>	<a href="#">575</a>
<b>Primary Max Current</b>	<a href="#">75.3A</a>
<b>Primary Markings</b>	<a href="#">H0-H1</a>
<b>Primary Terminals</b>	<a href="#">#2/0-6 AWG</a>
<b>Secondary Voltage</b>	<a href="#">460</a>
<b>Secondary Max Current</b>	<a href="#">94.1A</a>
<b>Secondary Markings</b>	<a href="#">X0-X1</a>
<b>Secondary Terminals</b>	<a href="#">#2/0-6 AWG</a>
<b>Primary Taps</b>	<a href="#">N/A</a>
<b>Conductor Material</b>	<a href="#">Copper</a>
<b>Insulation Class</b>	<a href="#">220°C (Class H)</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Efficiency (@35% Load) %</b>	<a href="#">N/A</a>
<b>Impedance Range</b>	<a href="#">0.5 – 1.5%</a>
<b>Sound (db)</b>	<a href="#">45 dB</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure Size</b>	<a href="#">E3R-4</a>
<b>Finish/Colour</b>	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>



OFFICIAL QUOTE

75KVA 575 VOLTS TO 460 VOLTS  
SINGLE PHASE AUTOTRANSFORMER



Country/Manufacturer

[Canada/RPM](#)