


## **OFFICIAL QUOTE**

### BA112H-M/EP



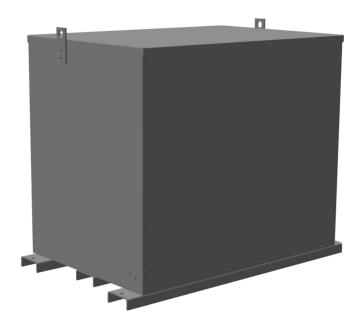


# BA112H-M/EP


\$14,515.09 USD

**SKU:** f010ff796030

**Categories:** Encapsulated Isolation Transformer

# SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





## **PRODUCT SPECIFICATIONS**

| Weight              | 1365 lbs            |
|---------------------|---------------------|
| Phases              | <u>3</u>            |
| kVA                 | 112.5               |
| Connection          | <u>3Ph-DY-5T-SD</u> |
| Primary Voltage     | 480                 |
| Primary Max Current | <u>135.3A</u>       |
| Primary Markings    | <u>H1-H2-3</u>      |
| Primary Terminals   | 300MCM-6            |



## **OFFICIAL QUOTE**

### BA112H-M/EP



| Secondary Voltage          | <u>208Y/120</u>  |
|----------------------------|--|
| Secondary Max Current      | 312.3A   |
| Secondary Markings         | X0-X1-X2-X3  |
| Secondary Terminals        | <u>Pads</u>  |
| Primary Taps               | <u>+/- 2 x 2.5%</u>  |
| Conductor Material         | Aluminum   |
| Temperatue Rise            | 130°C  |
| Insuation Class            | 200°C  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency                 | N/A  |
| Impedance                  | 1.5 - 3.5%   |
| Sound (db)                 | <u>50</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure                  | E3R-3PEP-8   |
| Finish                     | Polyster Powder Coat – ANSI/ASA 61 Grey  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |