





**BA112J-M/Z3**

**\$10,220.00 CAD**

SKU: 3d7399ae04a9

Categories: [Isolation Transformers](#)

## SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

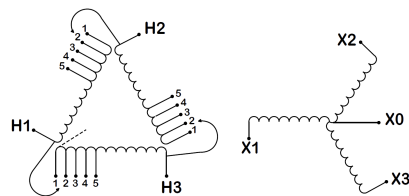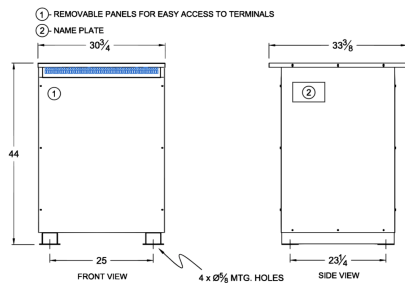

## PRODUCT SPECIFICATIONS

|                 |                              |
|-----------------|------------------------------|
| Weight          | 1030 lbs                     |
| Phases          | <a href="#">3</a>            |
| kVA             | <a href="#">112.5</a>        |
| Connection      | <a href="#">3Ph-DY-5T-SD</a> |
| Primary Voltage | <a href="#">600</a>          |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Primary Max Current        | <a href="#">108.3A</a>                                                                               |
| Primary Markings           | <a href="#">H1-H2-H3</a>                                                                             |
| Primary Terminals          | <a href="#">300MCM-6</a>                                                                             |
| Secondary Voltage          | <a href="#">208Y/120</a>                                                                             |
| Secondary Max Current      | <a href="#">312.3A</a>                                                                               |
| Secondary Markings         | <a href="#">X0-X1-X2-X3</a>                                                                          |
| Secondary Terminals        | <a href="#">300MCM-6 (2/Ph)</a>                                                                      |
| Primary Taps               | <a href="#">+/- 2 x 2.5%</a>                                                                         |
| Conductor Material         | <a href="#">Aluminum</a>                                                                             |
| Insuation Class            | <a href="#">220°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Impedance                  | <a href="#">4.0 – 6.0%</a>                                                                           |
| Sound (db)                 | <a href="#">50</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure                  | <a href="#">E3R-8</a>                                                                                |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>                                              |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |
| Efficiency                 | <a href="#">98.74%</a>                                                                               |