





BA112J-M/Z3

\$10,220.00 CAD

SKU: 3d7399ae04a9

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

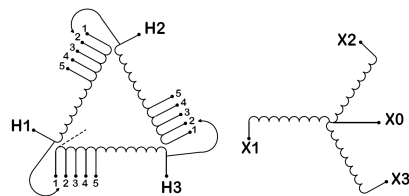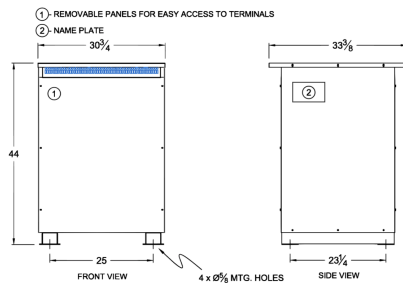

PRODUCT SPECIFICATIONS

Weight	1030 lbs
Phases	3
kVA	112.5
Connection	3Ph-DY-5T-SD
Primary Voltage	600



Primary Max Current	108.3A
Primary Markings	H1-H2-H3
Primary Terminals	300MCM-6
Secondary Voltage	208Y/120
Secondary Max Current	312.3A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	300MCM-6 (2/Ph)
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
Insuation Class	220°C
BIL (Insulation) Level	10kV
Impedance	4.0 – 6.0%
Sound (db)	50
Enclosure Type	NEMA 3R Indoor
Enclosure	E3R-8
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Efficiency	98.74%