


OFFICIAL QUOTE

BA112J-M/Z3



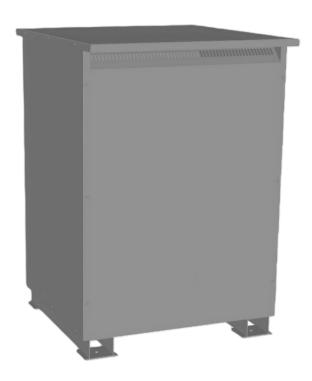


BA112J-M/Z3


\$7,526.72 USD

SKU: 3d7399ae04a9

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

Weight	1030 lbs
Phases	3
kVA	112.5
Connection	<u>3Ph-DY-5T-SD</u>
Primary Voltage	600



OFFICIAL QUOTE

BA112J-M/Z3



Primary Max Current	<u>108.3A</u>
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	300MCM-6
Secondary Voltage	<u>208Y/120</u>
Secondary Max Current	<u>312.3A</u>
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	300MCM-6 (2/Ph)
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
Insuation Class	220°C
BIL (Insulation) Level	<u>10kV</u>
Impedance	4.0 - 6.0%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure	<u>E3R-8</u>
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Efficiency	98.74%