





# BA30J-M/EP

## \$3,240.47 USD

SKU: bc338c10dc46


Categories: [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

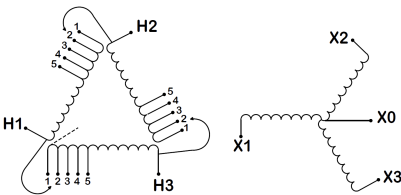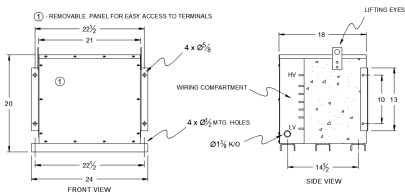

### PRODUCT SPECIFICATIONS

|                     |                              |
|---------------------|------------------------------|
| Weight              | 520 lbs                      |
| Phases              | <a href="#">3</a>            |
| kVA                 | <a href="#">30</a>           |
| Connection          | <a href="#">3Ph-DY-5T-SD</a> |
| Primary Voltage     | <a href="#">600</a>          |
| Primary Max Current | <a href="#">28.9A</a>        |
| Primary Markings    | <a href="#">H1-H2-3</a>      |
| Primary Terminals   | <a href="#">#2-14 AWG</a>    |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Secondary Voltage          | <a href="#">208Y/120</a>                                                                             |
| Secondary Max Current      | <a href="#">83.3A</a>                                                                                |
| Secondary Markings         | <a href="#">X0-X1-X2-X3</a>                                                                          |
| Secondary Terminals        | <a href="#">#2/0-6 AWG</a>                                                                           |
| Primary Taps               | <a href="#">+/- 2 x 2.5%</a>                                                                         |
| Conductor Material         | <a href="#">Aluminum</a>                                                                             |
| Temperatue Rise            | <a href="#">130°C</a>                                                                                |
| Insuation Class            | <a href="#">200°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency                 | <a href="#">N/A</a>                                                                                  |
| Impedance                  | <a href="#">1.5 – 3.5%</a>                                                                           |
| Sound (db)                 | <a href="#">45</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure                  | <a href="#">E3R-3PEP-5</a>                                                                           |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>                                              |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |