


## BA45H1-M/EP

**\$7,709.00 CAD**

SKU: 960343d59fba

Categories: [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

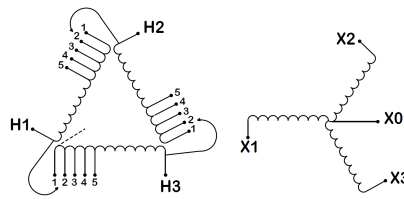

### PRODUCT SPECIFICATIONS

|                     |                              |
|---------------------|------------------------------|
| Weight              | 780 lbs                      |
| Phases              | <a href="#">3</a>            |
| kVA                 | <a href="#">45</a>           |
| Connection          | <a href="#">3Ph-DY-5T-SD</a> |
| Primary Voltage     | <a href="#">460</a>          |
| Primary Max Current | <a href="#">485.8A</a>       |
| Primary Markings    | <a href="#">H1-H2-3</a>      |
| Primary Terminals   | <a href="#">#2-14 AWG</a>    |



|                                       |  |
|---------------------------------------|--|
| <b>Secondary Voltage</b>              | <a href="#">208Y/120</a>   |
| <b>Secondary Max Current</b>          | <a href="#">124.9A</a>   |
| <b>Secondary Markings</b>             | <a href="#">X0-X1-X2-X3</a>  |
| <b>Secondary Terminals</b>            | <a href="#">300MCM-6</a>   |
| <b>Primary Taps</b>                   | <a href="#">+/- 2 x 2.5%</a>   |
| <b>Conductor Material</b>             | <a href="#">Aluminum</a>   |
| <b>Temperatue Rise</b>                | <a href="#">130°C</a>  |
| <b>Insuation Class</b>                | <a href="#">200°C</a>  |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Efficiency</b>                     | <a href="#">N/A</a>  |
| <b>Impedance</b>                      | <a href="#">1.5 – 3.5%</a>   |
| <b>Sound (db)</b>                     | <a href="#">45</a>   |
| <b>Enclosure Type</b>                 | <a href="#">NEMA 3R Indoor</a>   |
| <b>Enclosure</b>                      | <a href="#">E3R-3PEP-6</a>   |
| <b>Finish</b>                         | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |