



## BA45Q-M/Z3

**\$5,804.00 CAD**

SKU: 33a5d1e4c790

Categories: [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

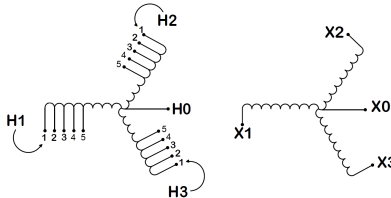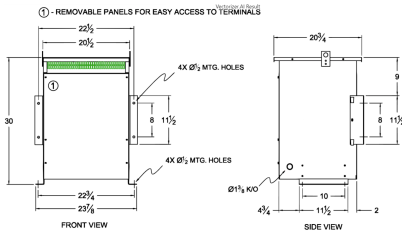

### PRODUCT SPECIFICATIONS

Weight	420 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">45</a>
Connection	<a href="#">3Ph-YY-5T-SD</a>
Primary Voltage	<a href="#">600Y/347</a>



<b>Primary Max Current</b>	<a href="#">43.3A</a>
<b>Primary Markings</b>	<a href="#">H0-H1-H2-H3</a>
<b>Primary Terminals</b>	<a href="#">#2-14 AWG</a>
<b>Secondary Voltage</b>	<a href="#">208Y/120</a>
<b>Secondary Max Current</b>	<a href="#">124.9A</a>
<b>Secondary Markings</b>	<a href="#">X0-X1-X2-X3</a>
<b>Secondary Terminals</b>	<a href="#">300MCM-6</a>
<b>Primary Taps</b>	<a href="#">+/- 2 x 2.5%</a>
<b>Conductor Material</b>	<a href="#">Aluminum</a>
<b>Insulation Class</b>	<a href="#">220°C</a>
<b>BIL (Insulation) Level</b>	<a href="#">10kV</a>
<b>Impedance</b>	<a href="#">4.0 – 6.0%</a>
<b>Sound (db)</b>	<a href="#">45</a>
<b>Enclosure Type</b>	<a href="#">NEMA 3R Indoor</a>
<b>Enclosure</b>	<a href="#">E3R-6</a>
<b>Finish</b>	<a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>
<b>Standards &amp; Certifications</b>	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
<b>Efficiency</b>	<a href="#">98.40%</a>