




## BA75J-M/Z3

**\$6,590.00 CAD**

SKU: 5da62949b7b7

Categories: [Isolation Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

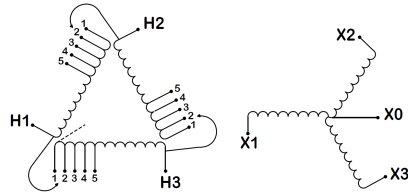

### PRODUCT SPECIFICATIONS

|                        |                     |
|------------------------|---------------------|
| <b>Weight</b>          | 650 lbs             |
| <b>Phases</b>          | <u>3</u>            |
| <b>kVA</b>             | <u>75</u>           |
| <b>Connection</b>      | <u>3Ph-DY-5T-SD</u> |
| <b>Primary Voltage</b> | <u>600</u>          |



|                                       |  |
|---------------------------------------|--|
| <b>Primary Max Current</b>            | <a href="#">72.2A</a>  |
| <b>Primary Markings</b>               | <a href="#">H1-H2-H3</a>   |
| <b>Primary Terminals</b>              | <a href="#">#2/0-6 AWG</a>   |
| <b>Secondary Voltage</b>              | <a href="#">208Y/120</a>   |
| <b>Secondary Max Current</b>          | <a href="#">208.2A</a>   |
| <b>Secondary Markings</b>             | <a href="#">X0-X1-X2-X3</a>  |
| <b>Secondary Terminals</b>            | <a href="#">600MCM-2</a>   |
| <b>Primary Taps</b>                   | <a href="#">+/- 2 x 2.5%</a>   |
| <b>Conductor Material</b>             | <a href="#">Aluminum</a>   |
| <b>Insulation Class</b>               | <a href="#">220°C</a>  |
| <b>BIL (Insulation) Level</b>         | <a href="#">10kV</a>   |
| <b>Impedance</b>                      | <a href="#">4.0 – 6.0%</a>   |
| <b>Sound (db)</b>                     | <a href="#">50</a>   |
| <b>Enclosure Type</b>                 | <a href="#">NEMA 3R Indoor</a>   |
| <b>Enclosure</b>                      | <a href="#">E3R-7</a>  |
| <b>Finish</b>                         | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| <b>Standards &amp; Certifications</b> | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |
| <b>Efficiency</b>                     | <a href="#">98.60%</a>   |