





**BA75Q-M/Z3**

**\$5,122.15 USD**

SKU: 0a81fdfa184d

Categories: [Isolation Transformers](#)

## SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

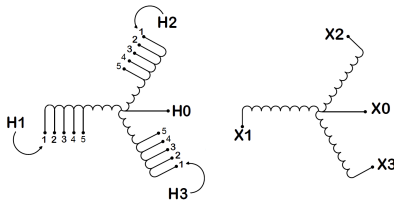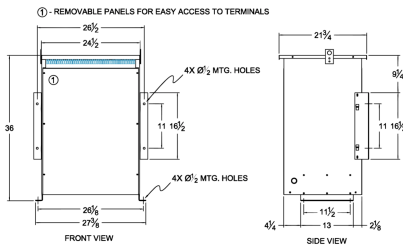

## PRODUCT SPECIFICATIONS

|                 |                              |
|-----------------|------------------------------|
| Weight          | 710 lbs                      |
| Phases          | <a href="#">3</a>            |
| kVA             | <a href="#">75</a>           |
| Connection      | <a href="#">3Ph-YY-5T-SD</a> |
| Primary Voltage | <a href="#">600Y/347</a>     |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Primary Max Current        | <a href="#">72.2A</a>                                                                                |
| Primary Markings           | <a href="#">H0-H1-H2-H3</a>                                                                          |
| Primary Terminals          | <a href="#">#2/0-6 AWG</a>                                                                           |
| Secondary Voltage          | <a href="#">208Y/120</a>                                                                             |
| Secondary Max Current      | <a href="#">208.2A</a>                                                                               |
| Secondary Markings         | <a href="#">X0-X1-X2-X3</a>                                                                          |
| Secondary Terminals        | <a href="#">600MCM-2</a>                                                                             |
| Primary Taps               | <a href="#">+/- 2 x 2.5%</a>                                                                         |
| Conductor Material         | <a href="#">Aluminum</a>                                                                             |
| Insuation Class            | <a href="#">220°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Impedance                  | <a href="#">4.0 – 6.0%</a>                                                                           |
| Sound (db)                 | <a href="#">50</a>                                                                                   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>                                                                       |
| Enclosure                  | <a href="#">E3R-7</a>                                                                                |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>                                              |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |
| Efficiency                 | <a href="#">98.60%</a>                                                                               |