


OFFICIAL QUOTE

BC112H-M/EP



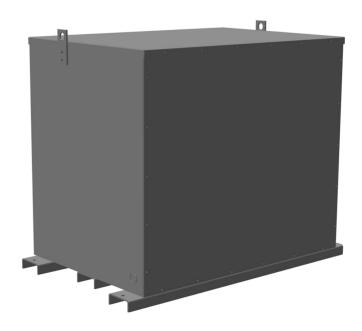


BC112H-M/EP


\$26,270.00 CAD

SKU: 76b338c7f5dd

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

| Weight | 1365 lbs |
|---------------------|----------------|
| Phases | 3 |
| kVA | 112.5 |
| Connection | 3Ph-DY-5T-SD |
| Primary Voltage | 480 |
| Primary Max Current | <u>135.3A</u> |
| Primary Markings | <u>H1-H2-3</u> |
| Primary Terminals | 300MCM-6 |



OFFICIAL QUOTE

BC112H-M/EP



| Secondary Voltage | <u>208Y/120</u> |
|----------------------------|--|
| Secondary Max Current | 312.3A |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | <u>+/- 2 x 2.5%</u> |
| Conductor Material | <u>Copper</u> |
| Temperatue Rise | 130°C |
| Insuation Class | 200°C |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency | N/A |
| Impedance | 1.5 - 3.5% |
| Sound (db) | <u>50</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | <u>E3R-3PEP-8</u> |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |