


### **OFFICIAL QUOTE**

#### BC15J-M/Z3



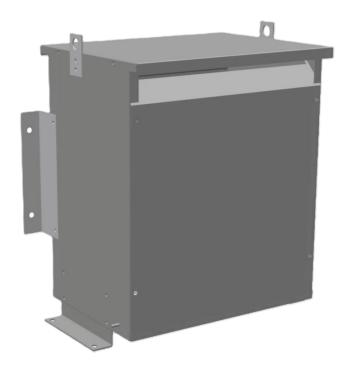


# **BC15J-M/Z3**


\$2,664.55 USD

**SKU:** f8921e5cf671

**Categories:** <u>Isolation Transformers</u>

#### **SCHEMATIC/DIAGRAM AND DIMENSION PICTURES**





## **PRODUCT SPECIFICATIONS**

| Weight              | 225 lbs             |
|---------------------|---------------------|
| Phases              | 3                   |
| kVA                 | <u>15</u>           |
| Connection          | <u>3Ph-DY-5T-SD</u> |
| Primary Voltage     | 600                 |
| Primary Max Current | <u>14.4A</u>        |



# OFFICIAL QUOTE BC15J-M/Z3



| Primary Markings           | <u>H1-H2-H3</u>  |
|----------------------------|--|
| Primary Terminals          | <u>#2-14 AWG</u>   |
| Secondary Voltage          | <u>208Y/120</u>  |
| Secondary Max Current      | 41.6A  |
| Secondary Markings         | X0-X1-X2-X3  |
| Secondary Terminals        | #2-14 AWG  |
| Primary Taps               | +/- 2 x 2.5%   |
| Conductor Material         | Copper   |
| Insuation Class            | 220°C  |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Impedance                  | 4.0 - 6.0%   |
| Sound (db)                 | <u>45</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure                  | <u>E3R-5</u>   |
| Finish                     | Polyster Powder Coat – ANSI/ASA 61 Grey  |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |