




## BC2J-F/EP

**\$1,584.15 USD**

SKU: 2d26fb5132ea

Categories: [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

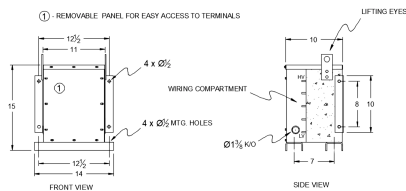

### PRODUCT SPECIFICATIONS

|                 |                              |
|-----------------|------------------------------|
| Weight          | 150 lbs                      |
| Phases          | <a href="#">3</a>            |
| kVA             | <a href="#">2</a>            |
| Connection      | <a href="#">3Ph-DY-NT-SD</a> |
| Primary Voltage | <a href="#">600</a>          |



|                            |  |
|----------------------------|--|
| Primary Max Current        | <a href="#">1.9A</a>   |
| Primary Markings           | <a href="#">H1-H2-3</a>  |
| Primary Terminals          | <a href="#">#2-14 AWG</a>  |
| Secondary Voltage          | <a href="#">380Y/220</a>   |
| Secondary Max Current      | <a href="#">3A</a>   |
| Secondary Markings         | <a href="#">X0-X1-X2-X3</a>  |
| Secondary Terminals        | <a href="#">#2-14 AWG</a>  |
| Primary Taps               | <a href="#">N/A</a>  |
| Conductor Material         | <a href="#">Copper</a>   |
| Temperatue Rise            | <a href="#">130°C</a>  |
| Insuation Class            | <a href="#">200°C</a>  |
| BIL (Insulation) Level     | <a href="#">10kV</a>   |
| Efficiency                 | <a href="#">N/A</a>  |
| Impedance                  | <a href="#">1.5 – 3.5%</a>   |
| Sound (db)                 | <a href="#">40</a>   |
| Enclosure Type             | <a href="#">NEMA 3R Indoor</a>   |
| Enclosure                  | <a href="#">E3R-3PEP-1</a>   |
| Finish                     | <a href="#">Polyster Powder Coat – ANSI/ASA 61 Grey</a>  |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a> |