




BC3Q-M

\$1,153.31 USD


SKU: 84e20a9fb44b
Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

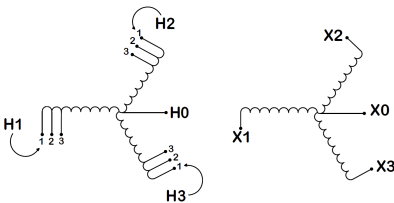

PRODUCT SPECIFICATIONS

| | |
|---------------------|---------------------------------|
| Weight | 80 lbs |
| Phases | 3 |
| kVA | 3 |
| Connection | 3Ph-YY-3T-SD |
| Primary Voltage | 600Y/347 |
| Primary Max Current | 2.9A |
| Primary Markings | H0-H1-H2-H3 |
| Primary Terminals | Terminal Blocks |



| | |
|----------------------------|--|
| Secondary Voltage | 208Y/120 |
| Secondary Max Current | 8.3A |
| Secondary Markings | X0-X1-X2-X3 |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | +/- 1 x 5% |
| Conductor Material | Copper |
| Insulation Class | 180°C |
| BIL (Insulation) Level | 10kV |
| Impedance | 5.5 – 7.0% |
| Sound (db) | 40 |
| Enclosure Type | NEMA 1 |
| Enclosure | E1-3 |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Efficiency | N/A |