


OFFICIAL QUOTE

BC6J-M



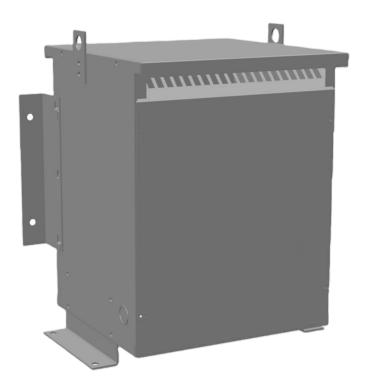


BC6J-M


\$1,873.00 CAD

SKU: b2fe48eda60d

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





PRODUCT SPECIFICATIONS

| Weight | 120 lbs |
|---------------------|-----------------|
| Phases | 3 |
| kVA | <u>6</u> |
| Connection | 3Ph-DY-3T-SD |
| Primary Voltage | 600 |
| Primary Max Current | <u>5.8A</u> |
| Primary Markings | <u>H1-H2-H3</u> |



OFFICIAL QUOTE

BC6J-M



| Primary Terminals | Terminal Blocks |
|----------------------------|--|
| Secondary Voltage | <u>208Y/120</u> |
| Secondary Max Current | <u>16.7A</u> |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | Terminal Blocks |
| Primary Taps | <u>+/- 1 x 5%</u> |
| Conductor Material | <u>Copper</u> |
| Insuation Class | 220°C |
| BIL (Insulation) Level | <u>10kV</u> |
| Impedance | <u>5.5 - 7.0%</u> |
| Sound (db) | 40 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure | <u>E3R-4</u> |
| Finish | Polyster Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Efficiency | N/A |