




BC75Q-M/Z3

~~5,982.35 USD~~ 5,683.23 USD

SKU: 90bffabe64dd

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

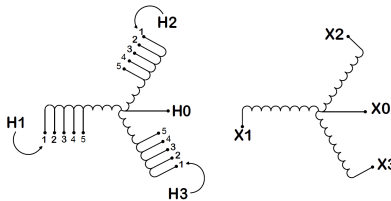

PRODUCT SPECIFICATIONS

Weight	670 lbs
Phases	<u>3</u>
kVA	<u>75</u>
Connection	<u>3Ph-YY-5T-SD</u>
Primary Voltage	<u>600Y/347</u>



Primary Max Current	72.2A
Primary Markings	H0-H1-H2-H3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	208Y/120
Secondary Max Current	208.2A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	600MCM-2
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
Insuation Class	220°C
BIL (Insulation) Level	10kV
Impedance	4.0 – 6.0%
Sound (db)	50
Enclosure Type	NEMA 3R Indoor
Enclosure	E3R-7
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Efficiency	98.74%