

9KVA 600 VOLTS TO 208Y/120 VOLTS
THREE PHASE ISOLATION
TRANSFORMER



9KVA 600 VOLTS TO
208Y/120 VOLTS THREE
PHASE ISOLATION
TRANSFORMER


\$1,539.22 USD

This Three Phase Isolation Transformer has a capacity of 9kVA, transforming 600 Volts to 208Y/120 volts.

SKU: a4c6e3a13c0b

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

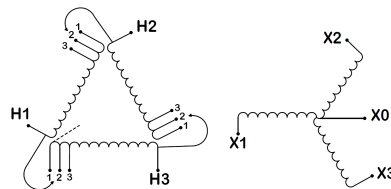

This Three Phase Isolation Transformer has a capacity of 9kVA, transforming 600 Volts to 208Y/120 volts.

9KVA 600 VOLTS TO 208Y/120 VOLTS
THREE PHASE ISOLATION
TRANSFORMER



PRODUCT DESCRIPTION

This Three Phase Isolation Transformer has a capacity of 9kVA, transforming 600 Volts to 208Y/120 volts.

Three-phase transformers are essential components in electrical systems, designed to transfer AC power between circuits with varying voltage levels while maintaining efficiency and reliability. They are commonly used in industrial, commercial, and utility applications to power equipment, distribute energy, and ensure system stability.

These transformers can provide electrical isolation between circuits, which helps prevent direct current (DC) flow, reduce ground loop interference, and protect sensitive equipment from electrical noise. With features like secondary neutral-to-ground bonding, they establish a stable reference point that minimizes common-mode noise and enhances system performance.

Three-phase transformers are versatile, offering solutions for applications such as voltage transformation, load balancing, and noise reduction. Their robust design ensures long-term operation, making them critical for delivering safe and efficient power in demanding environments.

PRODUCT SPECIFICATIONS

Weight	130 lbs
Phases	3
kVA	9
Connection	3Ph-DY-3T-SD
Primary Voltage	600
Primary Max Current	8.7A
Primary Markings	H1-H2-H3
Primary Terminals	Terminal Blocks
Secondary Voltage	208Y/120
Secondary Max Current	25A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	Terminal Blocks

9KVA 600 VOLTS TO 208Y/120 VOLTS
THREE PHASE ISOLATION
TRANSFORMER



Primary Taps	+/- 1 x 5%
Conductor Material	Copper
Insuation Class	220°C
BIL (Insulation) Level	10kV
Impedance	5.5 – 7.0%
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure	E3R-4
Finish	Polyster Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Efficiency	N/A