




**150VA 240/480 VOLTS TO 12/24
VOLTS SINGLE PHASE CONTROL
TRANSFORMER**

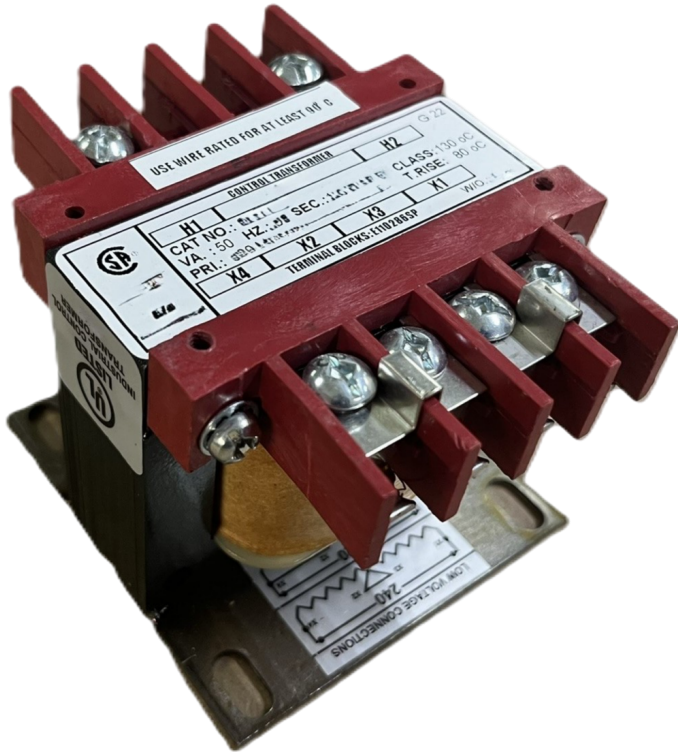

150VA 240/480 VOLTS TO 12/24 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$172.90 CAD



Single Phase Control Transformer with a capacity of 150VA, transforming 240/480 Volts to 12/24 Volts

SKU: CS150L-Z

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VS Rating	Overall Dimensions					
	Mounting Base				Mounting Stud	
	A	B	C	D	E	F
25	3	3	2.5	2.5	3.13	0.25 ± 0.025
50	3	3	2.5	2.5	3.13	0.25 ± 0.025
100	3	4	2.5	2.5	3.75	0.25 ± 0.025
150	3.75	4.25	3.13	3.25	3.5	0.25 ± 0.025
200	3.75	4.5	3.13	3.25	3.5	0.25 ± 0.025
250	3.75	5	3.13	3.25	3.5	0.31 ± 0.025
350	4.5	5	3.75	3.75	3.75	0.31 ± 0.025
500	5.25	5	4.38	4.5	3.75	0.31 ± 0.025
750	5.25	5.5	4.38	4.5	3.75	0.31 ± 0.025
1000	5.25	6.5	4.38	4.5	3.75	0.31 ± 0.025
1500	6.75	7.25	5.63	5	3.75	0.31 ± 0.025
2000	7.5	7.5	6.25	6.25	3.75	0.31 ± 0.025
2500	7.5	8.75	6.25	6	5.5	0.5
5000	9	10	8	7	7	0.44 ± 0.025

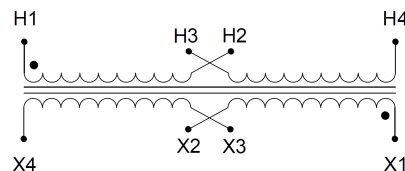

Single Phase Control Transformer with a capacity of 150VA, transforming 240/480 Volts to 12/24 Volts



PRODUCT SPECIFICATIONS

Weight	6 lbs
Phases	1
Connection	1Ph-CT-DD-SD
Primary Voltage	240/480
Primary Max Current	0.63A
Primary Markings	H1-H2-H3-H4
Primary Terminals	Terminals
Secondary Voltage	12/24
Secondary Max Current	12.5A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperature Rise	80°C
Insulation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

150VA 240/480 VOLTS TO 12/24
VOLTS SINGLE PHASE CONTROL
TRANSFORMER



VA	150
Country/Manufacturer	Canada/RPM