**OFFICIAL QUOTE**

**150VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER**

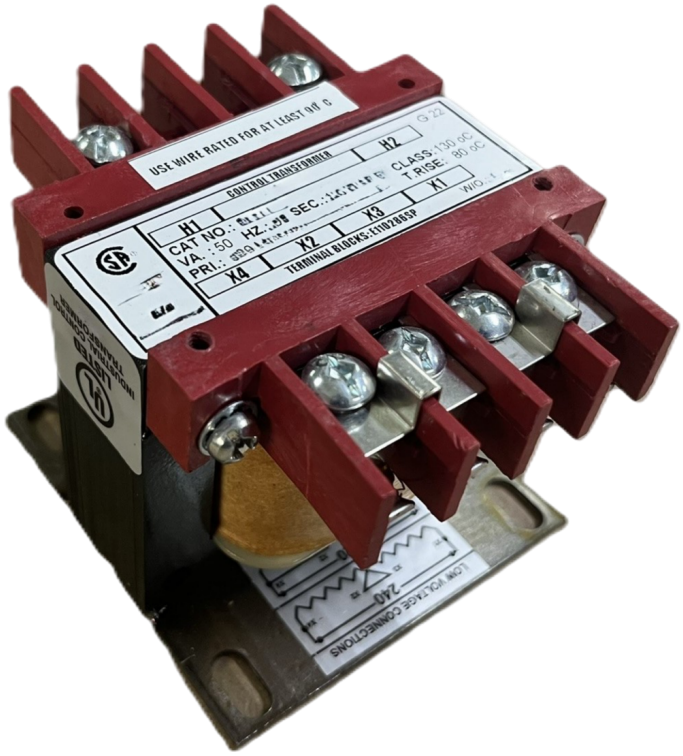


# 150VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

## $156.52 CAD

Single Phase Control Transformer with a capacity of 150VA, transforming 277 Volts to 120/240 Volts

**SKU:** CS150D-K
**Categories:** Control Transformers

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformers - Table of Dimensions (inches)

| VA Rating | Overall Dimensions A | B | C | Mounting Centres D & E | F | Mounting Slot |
|---|---|---|---|---|---|---|
| 25 | 3 | 3 | 2.5 | 2.5 | 2.5 | 3.13 | 0.25 x 0.625 |
| 50 | 3 | 3 | 2.5 | 2.5 | 2.5 | 3.13 | 0.25 x 0.625 |
| 100 | 3 | 4 | 2.5 | 2.5 | 3 | 3.75 | 0.25 x 0.625 |
| 150 | 3.75 | 4.25 | 3.13 | 3.25 | 3.5 | 4.5 | 0.25 x 0.625 |
| 200 | 3.75 | 4.5 | 3.13 | 3.25 | 3.5 | 4.5 | 0.25 x 0.625 |
| 250 | 3.75 | 5 | 3.13 | 3.25 | 3.5 | 4.5 | 0.31 x 0.625 |
| 350 | 4.5 | 5 | 3.75 | 3.75 | 3.75 | 4.75 | 0.31 x 0.625 |
| 500 | 5.25 | 5 | 4.38 | 4.5 | 3.75 | 4.75 | 0.31 x 0.625 |
| 750 | 5.25 | 5.5 | 4.38 | 4.5 | 32.75 | 4.75 | 0.31 x 0.625 |
| 1000 | 5.25 | 6.5 | 4.38 | 4.5 | 4.75 | 5.75 | 0.31 x 0.625 |
| 1500 | 6.75 | 7.25 | 5.63 | 5 | 3.75 | 5.25 | 0.31 x 0.625 |
| 2000 | 7.5 | 7.5 | 6.25 | 6 | 4.25 | 5.25 | 0.31 x 0.625 |
| 3000 | 7.5 | 8.75 | 6.25 | 6 | 5.5 | 6.5 | 0.31 x 0.625 |
| 5000 | 9 | 10 | 8 | 7 | 7 | 8 | 0.44 x 0.625 |



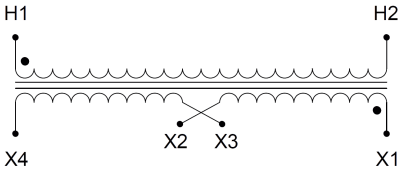


Single Phase Control Transformer with a capacity of 150VA, transforming 277 Volts to 120/240 Volts

**OFFICIAL QUOTE**

**150VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER**

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| **Weight** | 6 lbs |
| **Phases** | 1 |
| **Connection** | 1Ph-CT-SD-SD |
| **Primary Voltage** | 120/240 |
| **Primary Max Current** | 0.54A |
| **Primary Markings** | H1-H2 |
| **Primary Terminals** | Terminals |
| **Secondary Voltage** | 120/240 |
| **Secondary Max Current** | 1.25A |
| **Secondary Markings** | X1-X2-X3-X4 |
| **Secondary Terminals** | Terminals |
| **Primary Taps** | N/A |
| **Conductor Material** | Copper |
| **Temperatue Rise** | 80°C |
| **Insuation Class** | 130°C (Class B) |
| **BIL (Insulation) Level** | 10kV |
| **Efficiency (@35% Load) %** | N/A |
| **Impedance Range** | 5.0 – 7.0% |
| **Sound (db)** | 40 |
| **Enclosure Type** | Core & Coil |
| **Enclosure Size** | See Core & Coil Chart |
| **Finish/Colour** | N/A |
| **Standards & Certifications** | CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered |

**OFFICIAL QUOTE**

**150VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER**

| | |
|---|---|
| **VA** | 150 |
| **Country/Manufacturer** | Canada/RPM |