



## OFFICIAL QUOTE

### 150VA 347 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



## 150VA 347 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

**\$198.38 CAD**



Single Phase Control Transformer with a capacity of 150VA, transforming 347 Volts to 120/240 Volts

**SKU:** CE150E-K

**Categories:** [Control Transformers](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

| Control Transformer Dimensions (Table of Dimensions) |                    |       |      |                     |       |   |
|------------------------------------------------------|--------------------|-------|------|---------------------|-------|---|
| VA Rating                                            | Overall Dimensions |       |      | Mounting Dimensions |       |   |
|                                                      | A                  | B     | C    | D                   | E     | F |
| 25                                                   | 3                  | 6     | 3.5  | 1.375               | 4.375 |   |
| 50                                                   | 3                  | 6     | 3.5  | 1.375               | 4.375 |   |
| 100                                                  | 3                  | 6     | 3.5  | 1.375               | 4.375 |   |
| 150                                                  | 3.5                | 6.658 | 3.13 | 3.25                | 5     |   |
| 200                                                  | 3.5                | 6.658 | 3.13 | 3.25                | 5     |   |
| 250                                                  | 3.5                | 6.658 | 3.13 | 3.25                | 5     |   |
| 350                                                  | 4.125              | 6.5   | 3.75 | 3.75                | 7.875 |   |
| 500                                                  | 4.875              | 7     | 4.38 | 4.5                 | 5.5   |   |
| 750                                                  | 4.875              | 7     | 4.38 | 4.5                 | 5.5   |   |
| 1000                                                 | 4.875              | 7     | 4.38 | 4.5                 | 5.5   |   |
| 1500                                                 | 5.625              | 9     | 5.63 | 5                   | 7.25  |   |
| 2000                                                 | 6.875              | 9.25  | 6.25 | 6                   | 8     |   |
| 3000                                                 | 6.875              | 9.25  | 6.25 | 6                   | 8     |   |
| 5000                                                 | 8                  | 10.5  | 9.5  | 6                   | 9     |   |

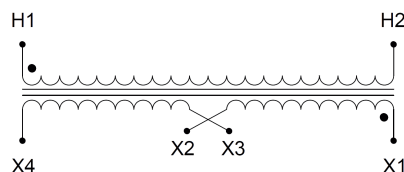

Single Phase Control Transformer with a capacity of 150VA, transforming 347 Volts to 120/240 Volts



## OFFICIAL QUOTE

**150VA 347 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER**





## OFFICIAL QUOTE

### 150VA 347 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



#### PRODUCT SPECIFICATIONS

|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Weight                     | 6 lbs                                                                                                |
| Phases                     | <a href="#">1</a>                                                                                    |
| Connection                 | <a href="#">1Ph-CT-SD-SD</a>                                                                         |
| Primary Voltage            | <a href="#">347</a>                                                                                  |
| Primary Max Current        | <a href="#">0.43A</a>                                                                                |
| Primary Markings           | <a href="#">H1-H2</a>                                                                                |
| Primary Terminals          | <a href="#">Leads</a>                                                                                |
| Secondary Voltage          | <a href="#">120/240</a>                                                                              |
| Secondary Max Current      | <a href="#">1.25A</a>                                                                                |
| Secondary Markings         | <a href="#">X1-X2-X3-X4</a>                                                                          |
| Secondary Terminals        | <a href="#">Leads</a>                                                                                |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperatue Rise            | <a href="#">80°C</a>                                                                                 |
| Insuation Class            | <a href="#">130°C (Class B)</a>                                                                      |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency (@35% Load) %   | <a href="#">N/A</a>                                                                                  |
| Impedance Range            | <a href="#">5.0 – 7.0%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">Type-1 Indoor</a>                                                                        |
| Enclosure Size             | <a href="#">See Enclosure Chart</a>                                                                  |
| Finish/Colour              | <a href="#">Semigloss – Black</a>                                                                    |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a> |



OFFICIAL QUOTE

150VA 347 VOLTS TO 120/240 VOLTS  
SINGLE PHASE CONTROL  
TRANSFORMER

|                      |                            |
|----------------------|----------------------------|
| VA                   | <a href="#">150</a>        |
| Country/Manufacturer | <a href="#">Canada/RPM</a> |