





TRANSFORMER

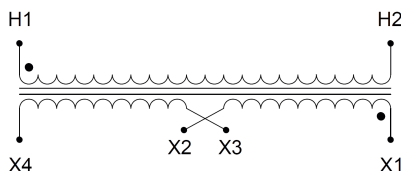

Categories: [Control Transformers](#)



Single Phase Control Transformer with a capacity of 200VA, transforming 480 Volts to 120/240 Volts



PRODUCT SPECIFICATIONS

| | |
|----------------------------|--|
| Weight | 23 lbs |
| Phases | 1 |
| Connection | 1Ph-CT-SD-SD |
| Primary Voltage | 480 |
| Primary Max Current | 0.42A |
| Primary Markings | H1-H2 |
| Primary Terminals | Terminals |
| Secondary Voltage | 120/240 |
| Secondary Max Current | 1.67A |
| Secondary Markings | X1-X2-X3-X4 |
| Secondary Terminals | Terminals |
| Primary Taps | N/A |
| Conductor Material | Copper |
| Temperature Rise | 80°C |
| Insulation Class | 130°C (Class B) |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 5.0 – 7.0% |
| Sound (db) | 40 |
| Enclosure Type | Core & Coil |
| Enclosure Size | See Core & Coil Chart |
| Finish/Colour | N/A |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered |



OFFICIAL QUOTE

200VA 480 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



| | |
|----------------------|----------------------------|
| VA | 200 |
| Country/Manufacturer | Canada/RPM |