



OFFICIAL QUOTE

250VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



250VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$234.78 CAD



Single Phase Control Transformer with a capacity of 250VA, transforming 277 Volts to 120/240 Volts

SKU: CE250D-K

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

Control Transformer Dimensions (Table of Dimensions)						
VA Rating	Overall Dimensions			Mounting Dimensions		
	A	B	C	Ø x L	Ø x L	Ø x L
25	3	6	3.5	1.375	4.375	4.375
50	3	6	3.5	1.375	4.375	4.375
100	3	6	3.5	1.375	4.375	4.375
150	3.5	6.658	3.13	3.25	5	5
200	3.5	6.658	3.13	3.25	5	5
250	3.5	6.658	3.13	3.25	5	5
350	4.125	6.5	3.75	3.75	7.875	7.875
500	4.875	7	4.38	4.5	5.5	5.5
750	4.875	7	4.38	4.5	5.5	5.5
1000	4.875	7	4.38	4.5	5.5	5.5
1500	5.625	9	5.63	5	7.25	7.25
2000	6.875	9.25	6.25	6	8	8
3000	6.875	9.25	6.25	6	8	8
5000	8	10.5	9.5	6	9	9

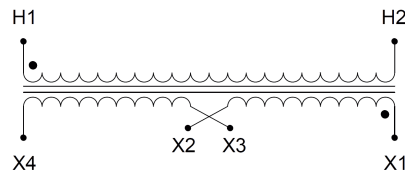

Single Phase Control Transformer with a capacity of 250VA, transforming 277 Volts to 120/240 Volts



OFFICIAL QUOTE

**250VA 277 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER**





OFFICIAL QUOTE

250VA 277 VOLTS TO 120/240 VOLTS SINGLE PHASE CONTROL TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	10 lbs
Phases	1
Connection	1Ph-CT-SD-SD
Primary Voltage	120/240
Primary Max Current	0.9A
Primary Markings	H1-H2
Primary Terminals	Leads
Secondary Voltage	120/240
Secondary Max Current	2.08A
Secondary Markings	X1-X2-X3-X4
Secondary Terminals	Leads
Primary Taps	N/A
Conductor Material	Copper
Temperatue Rise	80°C
Insuation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Type-1 Indoor
Enclosure Size	See Enclosure Chart
Finish/Colour	Semigloss – Black
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE

250VA 277 VOLTS TO 120/240 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER

VA	250
Country/Manufacturer	Canada/RPM