

75VA 480 VOLTS TO 120 VOLTS SINGLE PHASE CONTROL TRANSFORMER

\$96.46 CAD



Single Phase Control Transformer with a capacity of 75VA, transforming 480 Volts to 120 Volts

SKU: CS75H-A

Categories: [Control Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

VA Rating	Overall Dimensions						
	Mounting Centres					Mounting Slot	
	A	B	C	D	E		
25	3	3	2.5	2.5	2.5	0.13	0.25 ± 0.025
50	3	3	2.5	2.5	2.5	0.13	0.25 ± 0.025
100	3	4	2.5	2.5	3	0.75	0.25 ± 0.025
150	3	4	2.5	2.5	3	0.75	0.25 ± 0.025
150	3.75	4.25	3.11	3.25	3.5	4.5	0.25 ± 0.025
200	3.75	4.5	3.11	3.25	3.5	4.5	0.25 ± 0.025
250	3.75	5	3.11	3.25	3.5	4.5	0.31 ± 0.025
350	4.5	5	3.75	3.75	3.75	4.75	0.31 ± 0.025
500	5.25	5	4.38	4.5	3.75	4.75	0.31 ± 0.025
750	5.25	5.5	4.38	4.5	3.75	4.75	0.31 ± 0.025
1000	5.25	6	4.38	4.5	4.75	5.75	0.31 ± 0.025
1500	7.25	5.75	5.63	5.75	3.75	3.75	0.31 ± 0.025
2000	7.5	7.25	6.25	6	4.25	5.25	0.31 ± 0.025
3000	7.5	8.75	6.25	6	5.5	6.5	0.31 ± 0.025
5000	9	10	8	7	7	8	0.44 ± 0.025

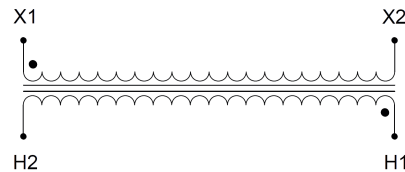

Single Phase Control Transformer with a capacity of 75VA, transforming 480 Volts to 120 Volts



PRODUCT SPECIFICATIONS

Weight	14 lbs
Phases	1
Connection	1Ph-CT-SS-SU
Primary Voltage	480
Primary Max Current	0.16A
Primary Markings	H1-H2
Primary Terminals	Terminals
Secondary Voltage	120
Secondary Max Current	0.63A
Secondary Markings	X1-X2
Secondary Terminals	Terminals
Primary Taps	N/A
Conductor Material	Copper
Temperature Rise	80°C
Insulation Class	130°C (Class B)
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	5.0 – 7.0%
Sound (db)	40
Enclosure Type	Core & Coil
Enclosure Size	See Core & Coil Chart
Finish/Colour	N/A
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered



OFFICIAL QUOTE
75VA 480 VOLTS TO 120 VOLTS
SINGLE PHASE CONTROL
TRANSFORMER



VA	
Country/Manufacturer	Canada/RPM