


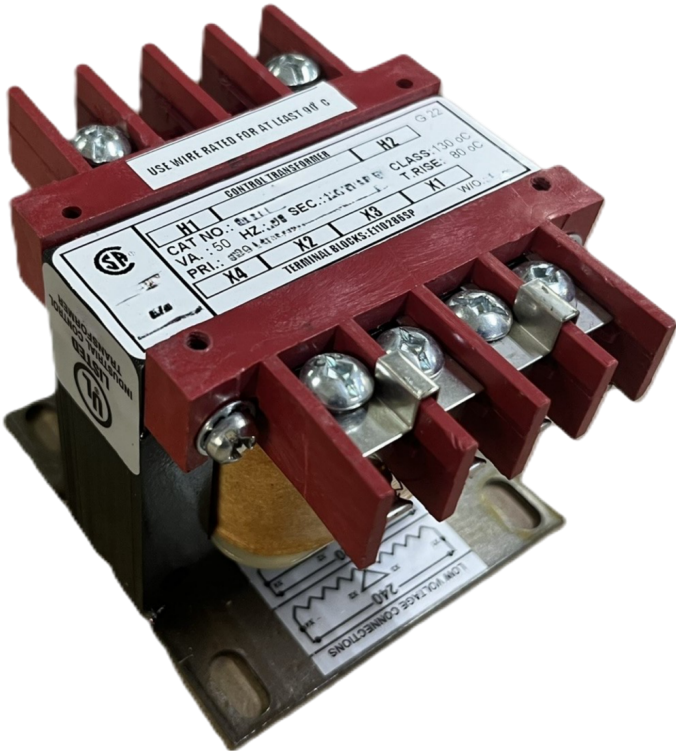

# CS50K-Z


## \$107.00 CAD

SKU: 85ecfa0fbec6

Categories: [Control Transformers](#)

### PRODUCT SPECIFICATIONS

|                       |                              |
|-----------------------|------------------------------|
| Weight                | 14 lbs                       |
| Phases                | <a href="#">1</a>            |
| VA                    | <a href="#">50</a>           |
| Connection            | <a href="#">1Ph-CT-DD-SD</a> |
| Primary Voltage       | <a href="#">120/240</a>      |
| Primary Max Current   | <a href="#">0.42A</a>        |
| Primary Markings      | <a href="#">H1-H2-H3-H4</a>  |
| Primary Terminals     | <a href="#">Terminals</a>    |
| Secondary Voltage     | <a href="#">12/24</a>        |
| Secondary Max Current | <a href="#">4.17A</a>        |
| Secondary Markings    | <a href="#">X1-X2-X3-X4</a>  |



|                            |                                                                                                      |
|----------------------------|------------------------------------------------------------------------------------------------------|
| Secondary Terminals        | <a href="#">Terminals</a>                                                                            |
| Primary Taps               | <a href="#">N/A</a>                                                                                  |
| Conductor Material         | <a href="#">Copper</a>                                                                               |
| Temperatue Rise            | <a href="#">80°C</a>                                                                                 |
| Insuation Class            | <a href="#">130°C</a>                                                                                |
| BIL (Insulation) Level     | <a href="#">10kV</a>                                                                                 |
| Efficiency                 | <a href="#">N/A</a>                                                                                  |
| Impedance                  | <a href="#">5.0 – 7.0%</a>                                                                           |
| Sound (db)                 | <a href="#">40</a>                                                                                   |
| Enclosure Type             | <a href="#">Core &amp; Coil</a>                                                                      |
| Enclosure                  | <a href="#">See Chart</a>                                                                            |
| Standards & Certifications | <a href="#">CSA Certified File No. LR34493, UL Listed File No. E110286, ISO 9001:2015 Registered</a> |
| Finish                     | <a href="#">N/AN/A</a>                                                                               |