


OFFICIAL QUOTE

112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



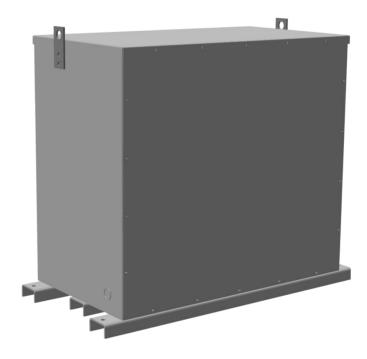

112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$12,856.00 CAD


Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 208Y Volts

SKU: RA112J-B/EP

Categories: Encapsulated Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 208Y Volts



OFFICIAL QUOTE



112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1300 lbs
Phases	3
kVA	112.5
Connection	3PhA-NT-1
Primary Voltage	600
Primary Markings	H1-H2-H3
Primary Terminals	300MCM-6
Secondary Voltage	208
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>0.5 – 1.5%</u>
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-3PEP-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	130°C
Insuation Class	200°C (Class N)