


OFFICIAL QUOTE

112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



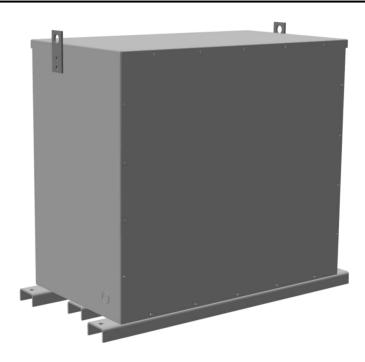

112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$12,856.00 CAD


Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 208Y Volts

SKU: RA112J-B/EP

Categories: Encapsulated Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 208Y Volts



OFFICIAL QUOTE



112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| Weight | 1300 lbs |
|----------------------------|--|
| Phases | <u>3</u> |
| kVA | 112.5 |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 600 |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | 300MCM-6 |
| Secondary Voltage | 208 |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 0.5 – 1.5% |
| Sound (db) | <u>50</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-3PEP-7</u> |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | 130°C |
| Insuation Class | 200°C (Class N) |