


OFFICIAL QUOTE

112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



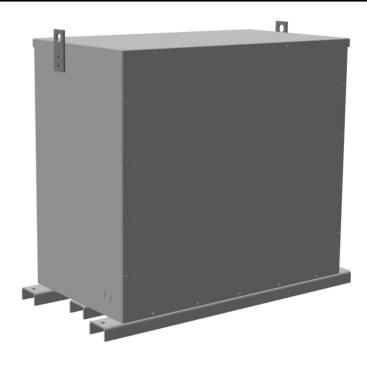

112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$14,184.00 CAD


Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 208Y Volts

SKU: RC112J-B/EP

Categories: Encapsulated Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 112.5kVA, transforming 600Y Volts to 208Y Volts



OFFICIAL QUOTE



112.5KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

Weight	1160 lbs
Phases	3
kVA	112.5
Connection	<u>3PhA-NT-1</u>
Primary Voltage	600
Primary Markings	<u>H1-H2-H3</u>
Primary Terminals	300MCM-6
Secondary Voltage	208
Secondary Markings	<u>X1-X2-X3</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	N/A
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 - 1.5%
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-3PEP-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	130°C
Insuation Class	200°C (Class N)