


OFFICIAL QUOTE

150KVA 480 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



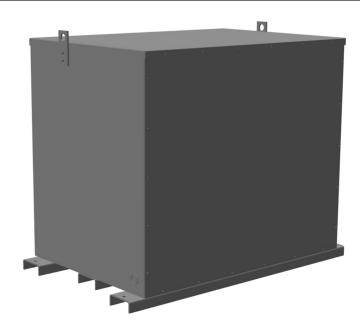

150KVA 480 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$15,282.00 CAD


Three Phase Encapsulated Autotransformer with a capacity of 150kVA, transforming 480Y Volts to 208Y Volts

SKU: RA150H-B/EP

Categories: Encapsulated Autotransformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 150kVA, transforming 480Y Volts to 208Y Volts



OFFICIAL QUOTE



150KVA 480 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER

PRODUCT SPECIFICATIONS

| Weight | 1365 lbs |
|----------------------------|--|
| Phases | 3 |
| kVA | <u>150</u> |
| Connection | 3PhA-NT-1 |
| Primary Voltage | 480 |
| Primary Markings | H1-H2-H3 |
| Primary Terminals | 300MCM-6 |
| Secondary Voltage | 208 |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>Pads</u> |
| Primary Taps | N/A |
| Conductor Material | Aluminum |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | <u>50</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-3PEP-8</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | 130°C |
| Insuation Class | 200°C (Class N) |