


### **OFFICIAL QUOTE**

## 15KVA 480 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



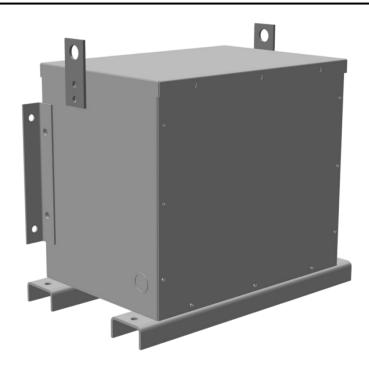

# 15KVA 480 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$2,550.00 CAD


Three Phase Encapsulated Autotransformer with a capacity of 15kVA, transforming 480Y Volts to 240Y Volts

SKU: RC15H-C/EP

Categories: Encapsulated Autotransformer

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 15kVA, transforming 480Y Volts to 240Y Volts



## **OFFICIAL QUOTE**



# 15KVA 480 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER

## **PRODUCT SPECIFICATIONS**

| Weight                     | 400 lbs  |
|----------------------------|--|
| Phases                     | 3  |
| kVA                        | <u>15</u>  |
| Connection                 | 3PhA-NT-1  |
| Primary Voltage            | 480  |
| Primary Markings           | H1-H2-H3   |
| Primary Terminals          | #2-14 AWG  |
| Secondary Voltage          | 240  |
| Secondary Markings         | X1-X2-X3   |
| Secondary Terminals        | #2-14 AWG  |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| BIL (Insulation) Level     | 10kV   |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | <u>0.5 – 1.5%</u>  |
| Sound (db)                 | <u>45</u>  |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | <u>E3R-3PEP-3</u>  |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise            | 130°C  |
| Insuation Class            | 200°C (Class N)  |