


OFFICIAL QUOTE

75KVA 600 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



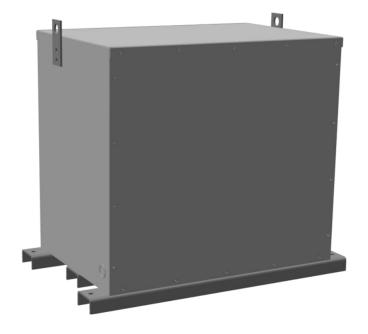


75KVA 600 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$9,191.00 CAD

Three Phase Encapsulated Autotransformer with a capacity of 75kVA, transforming 600Y Volts to 240Y Volts

SKU: RC75J-C/EP Categories: <u>Encapsulated Autotransformer</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Autotransformer with a capacity of 75kVA, transforming 600Y Volts to 240Y Volts



OFFICIAL QUOTE

75KVA 600 VOLTS TO 240 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

| Weight | 830 lbs |
|----------------------------|-----------------------------------------------------------------------------------------|
| Phases | 3 |
| kVA | <u>75</u> |
| Connection | <u>3PhA-NT-1</u> |
| Primary Voltage | <u>600</u> |
| Primary Markings | <u>H1-H2-H3</u> |
| Primary Terminals | <u>#2/0-6 AWG</u> |
| Secondary Voltage | 240 |
| Secondary Markings | <u>X1-X2-X3</u> |
| Secondary Terminals | <u>300MCM-6</u> |
| Primary Taps | <u>N/A</u> |
| Conductor Material | <u>Copper</u> |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | <u>N/A</u> |
| Impedance Range | <u>0.5 – 1.5%</u> |
| Sound (db) | <u>45</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | E3R-3PEP-6 |
| Finish/Colour | Polyester Powder Coat – ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Temperatue Rise | <u>130°C</u> |
| Insuation Class | <u>200°C (Class N)</u> |