


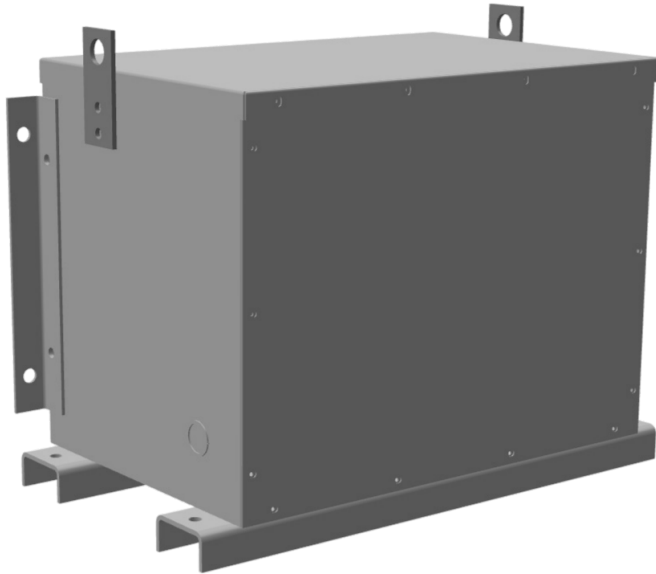

75KVA 600 VOLTS TO 480 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER


\$3,206.00 CAD

Three Phase Encapsulated Autotransformer with a capacity of 75kVA, transforming 600Y Volts to 480Y Volts

SKU: RA75J-H/EP

Categories: [Encapsulated Autotransformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

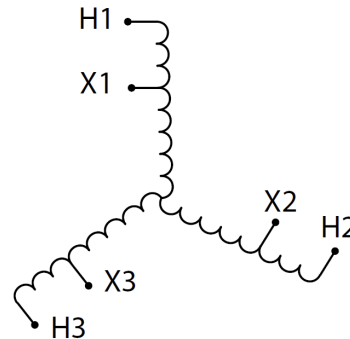

Three Phase Encapsulated Autotransformer with a capacity of 75kVA, transforming 600Y Volts to 480Y Volts



PRODUCT SPECIFICATIONS

Weight	500 lbs
Phases	3
kVA	75
Connection	3PhA-NT-1
Primary Voltage	600
Primary Markings	H1-H2-H3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	480
Secondary Markings	X1-X2-X3
Secondary Terminals	#2/0-6 AWG
Primary Taps	N/A
Conductor Material	Aluminum
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	0.5 – 1.5%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-3PEP-4
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	130°C
Insuation Class	200°C (Class N)