




# OFFICIAL QUOTE

## 9KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER

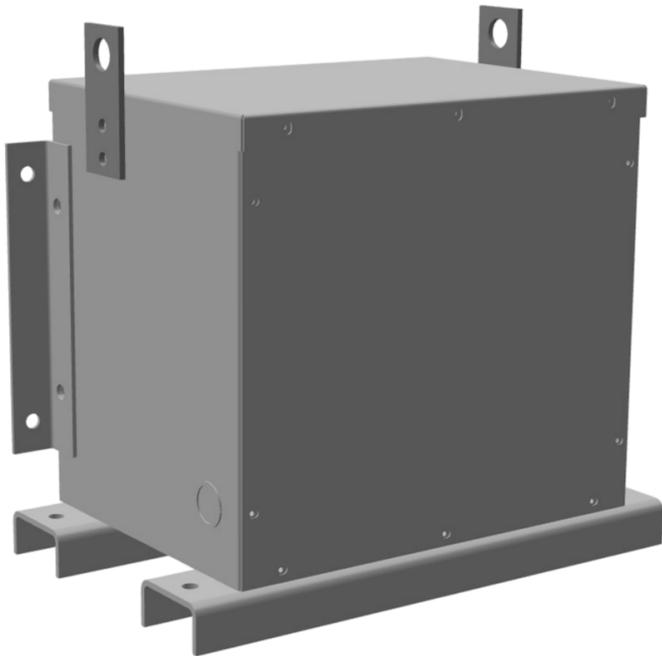

## 9KVA 600 VOLTS TO 208 VOLTS THREE PHASE ENCAPSULATED AUTOTRANSFORMER



**\$2,148.00 CAD**

Three Phase Encapsulated Autotransformer with a capacity of 9kVA, transforming 600Y Volts to 208Y Volts

**SKU:** RC9J-B/EP

**Categories:** [Encapsulated Autotransformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

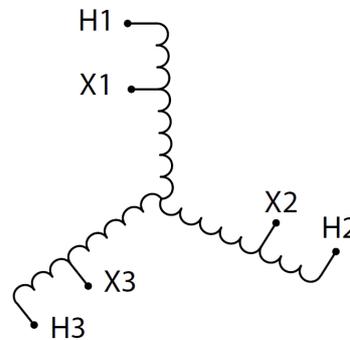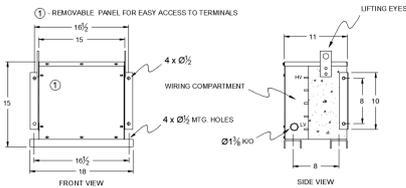

Three Phase Encapsulated Autotransformer with a capacity of 9kVA, transforming 600Y Volts to 208Y Volts



OFFICIAL QUOTE

9KVA 600 VOLTS TO 208 VOLTS  
THREE PHASE ENCAPSULATED  
AUTOTRANSFORMER



PRODUCT SPECIFICATIONS

Weight	240 lbs
Phases	<a href="#">3</a>
kVA	<a href="#">9</a>
Connection	<a href="#">3PhA-NT-1</a>
Primary Voltage	<a href="#">600</a>
Primary Markings	<a href="#">H1-H2-H3</a>
Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">208</a>
Secondary Markings	<a href="#">X1-X2-X3</a>
Secondary Terminals	<a href="#">#2-14 AWG</a>
Primary Taps	<a href="#">N/A</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">0.5 – 1.5%</a>
Sound (db)	<a href="#">40</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-3PEP-2</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Temperatue Rise	<a href="#">130°C</a>
Insuation Class	<a href="#">200°C (Class N)</a>