


#### **OFFICIAL QUOTE**

# 0.75KVA 575 VOLTS TO 120/240 VOLTS SINGLE PHASE ENCAPSULATED ISOLATION TRANSFORMER



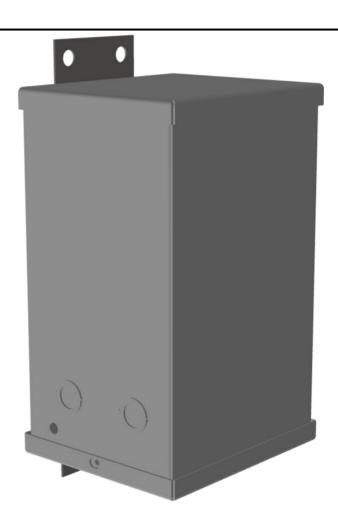

# 0.75KVA 575 VOLTS TO 120/240 VOLTS SINGLE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$513.00 CAD


Single Phase Encapsulated Isolation Transformer with a capacity of 0.75kVA, transforming 575 Volts to 120/240 Volts

**SKU:** SC0.75J1-K/EP

Categories: Encapsulated Isolation Transformer

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Encapsulated Isolation Transformer with a capacity of 0.75kVA, transforming 575 Volts to 120/240 Volts



### **OFFICIAL QUOTE**



# 0.75KVA 575 VOLTS TO 120/240 VOLTS SINGLE PHASE ENCAPSULATED ISOLATION TRANSFORMER

## PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |  |
|----------------------------|--|
| Weight                     | 25 lbs   |
| Phases                     | 1  |
| kVA                        | 0.75   |
| Connection                 | 1Ph-1coil-NT-SD  |
| Primary Voltage            | <u>575</u>   |
| Primary Max Current        | 1.3A   |
| Primary Markings           | H1-H2  |
| Primary Terminals          | <u>Leads</u>   |
| Secondary Voltage          | 120/240  |
| Secondary Max Current      | 6.3A   |
| Secondary Markings         | <u>X1-X3-X2-X4</u>   |
| Secondary Terminals        | <u>Leads</u>   |
| Primary Taps               | N/A  |
| Conductor Material         | Copper   |
| BIL (Insulation) Level     | <u>10kV</u>  |
| Efficiency (@35% Load) %   | N/A  |
| Impedance Range            | <u>1.5 - 3.5%</u>  |
| Sound (db)                 | 40   |
| Enclosure Type             | NEMA 3R Indoor   |
| Enclosure Size             | E3R-1PEP-2   |
| Finish/Colour              | Polyester Powder Coat - ANSI/ASA 61 Grey   |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Country/Manufacturer       | Canada/RPM   |