




# OFFICIAL QUOTE



## 25KVA 460 VOLTS TO 120/240 VOLTS SINGLE PHASE ENCAPSULATED ISOLATION TRANSFORMER

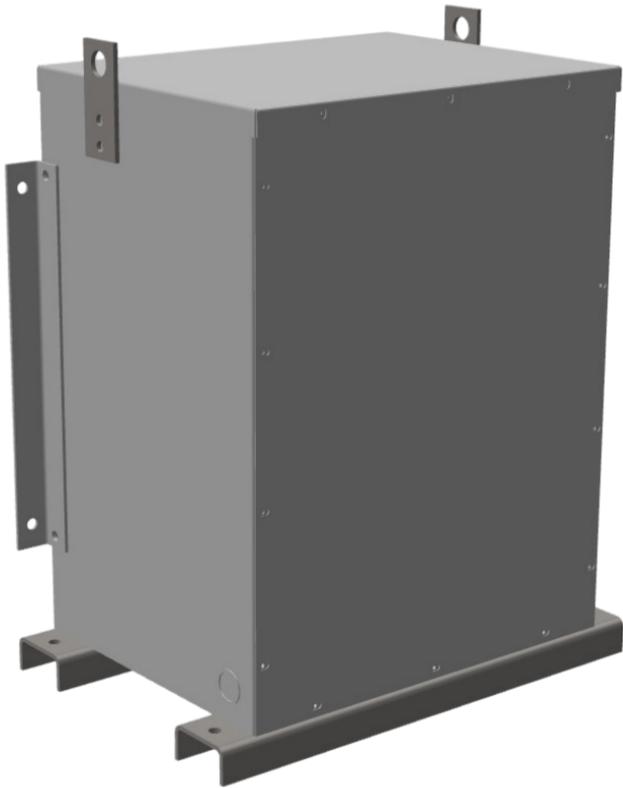

## 25KVA 460 VOLTS TO 120/240 VOLTS SINGLE PHASE ENCAPSULATED ISOLATION TRANSFORMER



**\$4,219.00 CAD**

Single Phase Encapsulated Isolation Transformer with a capacity of 25kVA, transforming 460 Volts to 120/240 Volts

**SKU:** SC25H1-K/EP

**Categories:** [Encapsulated Isolation Transformer](#)

### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

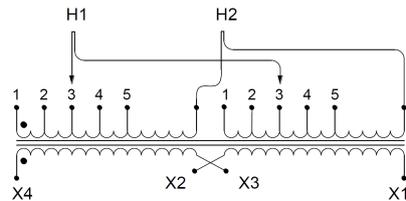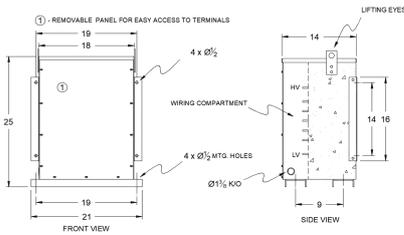

Single Phase Encapsulated Isolation Transformer with a capacity of 25kVA, transforming 460 Volts to 120/240 Volts



OFFICIAL QUOTE



25KVA 460 VOLTS TO 120/240 VOLTS  
SINGLE PHASE ENCAPSULATED  
ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

Weight	330 lbs
Phases	<a href="#">1</a>
kVA	<a href="#">25</a>
Connection	<a href="#">1Ph-2coil-5t-SD</a>
Primary Voltage	<a href="#">460</a>
Primary Max Current	<a href="#">54.3A</a>
Primary Markings	<a href="#">H1-H2</a>
Primary Terminals	<a href="#">#2-14 AWG</a>
Secondary Voltage	<a href="#">120/240</a>
Secondary Max Current	<a href="#">208.3A</a>
Secondary Markings	<a href="#">X1-X3-X2-X4</a>
Secondary Terminals	<a href="#">#2/0-6 AWG</a>
Primary Taps	<a href="#">+/- 2 x 2.5%</a>
Conductor Material	<a href="#">Copper</a>
BIL (Insulation) Level	<a href="#">10kV</a>
Efficiency (@35% Load) %	<a href="#">N/A</a>
Impedance Range	<a href="#">1.5 – 3.5%</a>
Sound (db)	<a href="#">45</a>
Enclosure Type	<a href="#">NEMA 3R Indoor</a>
Enclosure Size	<a href="#">E3R-1PEP-6</a>
Finish/Colour	<a href="#">Polyester Powder Coat – ANSI/ASA 61 Grey</a>
Standards & Certifications	<a href="#">CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered</a>
Country/Manufacturer	<a href="#">Canada/RPM</a>