



**2KVA 600 VOLTS TO 240Y/139 VOLTS
THREE PHASE ENCAPSULATED
ISOLATION TRANSFORMER**



**2KVA 600 VOLTS TO
240Y/139 VOLTS THREE
PHASE ENCAPSULATED
ISOLATION TRANSFORMER**


\$1,522.00 CAD

Three Phase Encapsulated Isolation Transformer
with a capacity of 2kVA, transforming 600 Volts to
240Y/139 Volts

SKU: BC2J-S/EP

Categories: [Encapsulated Isolation Transformer](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

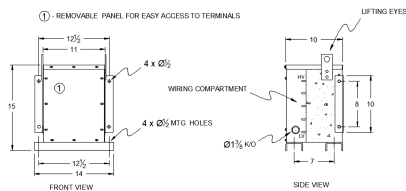

Three Phase Encapsulated Isolation Transformer with a capacity of 2kVA, transforming 600 Volts to 240Y/139 Volts

2KVA 600 VOLTS TO 240Y/139 VOLTS
THREE PHASE ENCAPSULATED
ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	150 lbs
Phases	3
kVA	2
Connection	3Ph-DY-NT-SD
Primary Voltage	600
Primary Max Current	1.9A
Primary Markings	H1-H2-3
Primary Terminals	#2-14 AWG
Secondary Voltage	240Y/139
Secondary Max Current	4.8A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	#2-14 AWG
Primary Taps	N/A
Conductor Material	Copper
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	N/A
Impedance Range	1.5 – 3.5%
Sound (db)	40
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-3PEP-1
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Country/Manufacturer	Canada/RPM