


OFFICIAL QUOTE

45KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



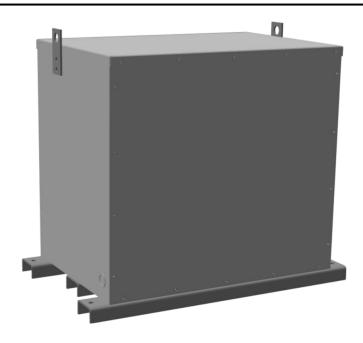

45KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$7,709.00 CAD


Three Phase Encapsulated Isolation Transformer with a capacity of 45kVA, transforming 460 Volts to 208Y/120 Volts

SKU: BA45H1-M/EP

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Isolation Transformer with a capacity of 45kVA, transforming 460 Volts to 208Y/120 Volts



OFFICIAL QUOTE



45KVA 460 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS | |
|----------------------------|--|
| Weight | 780 lbs |
| Phases | 3 |
| kVA | 45 |
| Connection | 3Ph-DY-5T-SD |
| Primary Voltage | 460 |
| Primary Max Current | 485.8A |
| Primary Markings | H1-H2-3 |
| Primary Terminals | #2-14 AWG |
| Secondary Voltage | 208Y/120 |
| Secondary Max Current | 124.9A |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | 300MCM-6 |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | Aluminum |
| BIL (Insulation) Level | <u>10kV</u> |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | <u>1.5 - 3.5%</u> |
| Sound (db) | 45 |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-3PEP-6</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Country/Manufacturer | Canada/RPM |