


### **OFFICIAL QUOTE**

## 6KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



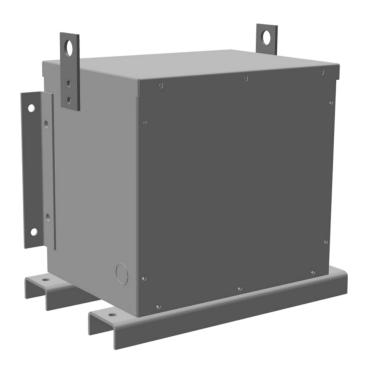

# 6KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$2,313.00 CAD


Three Phase Encapsulated Isolation Transformer with a capacity of 6kVA, transforming 600 Volts to 208Y/120 Volts

SKU: BC6J-M/EP

Categories: Encapsulated Isolation Transformer

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Isolation Transformer with a capacity of 6kVA, transforming 600 Volts to 208Y/120 Volts



## **OFFICIAL QUOTE**



# 6KVA 600 VOLTS TO 208Y/120 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

| PRODUCT SPECIFICATIONS     |                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------|
| Weight                     | 185 lbs                                                                              |
| Phases                     | <u>3</u>                                                                             |
| kVA                        | <u>6</u>                                                                             |
| Connection                 | 3Ph-DY-3T-SD                                                                         |
| Primary Voltage            | 600                                                                                  |
| Primary Max Current        | 5.8A                                                                                 |
| Primary Markings           | H1-H2-3                                                                              |
| Primary Terminals          | #2-14 AWG                                                                            |
| Secondary Voltage          | <u>208Y/120</u>                                                                      |
| Secondary Max Current      | 16.7A                                                                                |
| Secondary Markings         | <u>X0-X1-X2-X3</u>                                                                   |
| Secondary Terminals        | #2-14 AWG                                                                            |
| Primary Taps               | <u>+/- 1 x 5%</u>                                                                    |
| Conductor Material         | Copper                                                                               |
| BIL (Insulation) Level     | <u>10kV</u>                                                                          |
| Efficiency (@35% Load) %   | N/A                                                                                  |
| Impedance Range            | <u>1.5 – 3.5%</u>                                                                    |
| Sound (db)                 | 40                                                                                   |
| Enclosure Type             | NEMA 3R Indoor                                                                       |
| Enclosure Size             | E3R-3PEP-2                                                                           |
| Finish/Colour              | Polyester Powder Coat – ANSI/ASA 61 Grey                                             |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Country/Manufacturer       | Canada/RPM                                                                           |