


OFFICIAL QUOTE

75KVA 480 VOLTS TO 400Y/231 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



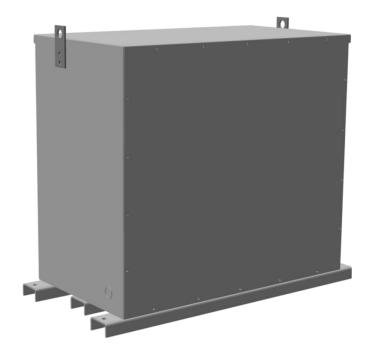

75KVA 480 VOLTS TO 400Y/231 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$12,856.00 CAD


Three Phase Encapsulated Isolation Transformer with a capacity of 75kVA, transforming 480 Volts to 400Y/231 Volts

SKU: BA75H-N1/EP

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Isolation Transformer with a capacity of 75kVA, transforming 480 Volts to 400Y/231 Volts



OFFICIAL QUOTE



75KVA 480 VOLTS TO 400Y/231 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	1300 lbs
Phases	<u>3</u>
kVA	<u>75</u>
Connection	3Ph-DY-5T-SD
Primary Voltage	480
Primary Max Current	90.2A
Primary Markings	H1-H2-3
Primary Terminals	#2/0-6 AWG
Secondary Voltage	400Y/231
Secondary Markings	<u>X0-X1-X2-X3</u>
Secondary Terminals	300MCM-6
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	N/A
Impedance Range	<u>1.5 – 3.5%</u>
Sound (db)	<u>50</u>
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-3PEP-7</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Country/Manufacturer	Canada/RPM