


OFFICIAL QUOTE

75KVA 480 VOLTS TO 400Y/231 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER



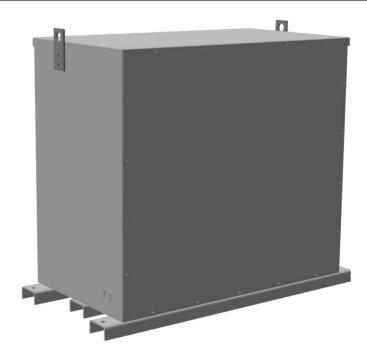

75KVA 480 VOLTS TO 400Y/231 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER


\$12,856.00 CAD


Three Phase Encapsulated Isolation Transformer with a capacity of 75kVA, transforming 480 Volts to 400Y/231 Volts

SKU: BA75H-N1/EP

Categories: Encapsulated Isolation Transformer

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Encapsulated Isolation Transformer with a capacity of 75kVA, transforming 480 Volts to 400Y/231 Volts



OFFICIAL QUOTE



75KVA 480 VOLTS TO 400Y/231 VOLTS THREE PHASE ENCAPSULATED ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

| Weight | 1300 lbs |
|----------------------------|--|
| Phases | <u>3</u> |
| kVA | <u>75</u> |
| Connection | 3Ph-DY-5T-SD |
| Primary Voltage | 480 |
| Primary Max Current | 90.2A |
| Primary Markings | H1-H2-3 |
| Primary Terminals | #2/0-6 AWG |
| Secondary Voltage | 400Y/231 |
| Secondary Markings | <u>X0-X1-X2-X3</u> |
| Secondary Terminals | 300MCM-6 |
| Primary Taps | +/- 2 x 2.5% |
| Conductor Material | Aluminum |
| BIL (Insulation) Level | 10kV |
| Efficiency (@35% Load) % | N/A |
| Impedance Range | 1.5 - 3.5% |
| Sound (db) | <u>50</u> |
| Enclosure Type | NEMA 3R Indoor |
| Enclosure Size | <u>E3R-3PEP-7</u> |
| Finish/Colour | Polyester Powder Coat - ANSI/ASA 61 Grey |
| Standards & Certifications | CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered |
| Country/Manufacturer | Canada/RPM |