


OFFICIAL QUOTE

100VA 347 VOLTS TO 347 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



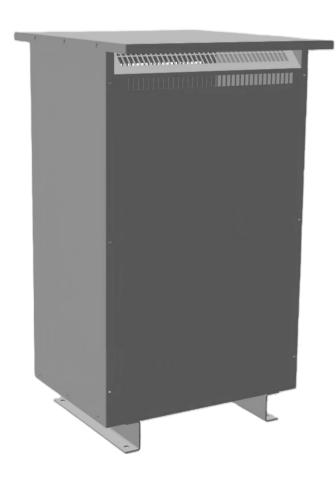

100VA 347 VOLTS TO 347 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$10,434.31 CAD


Single Phase Isolation Transformer with a capacity of 100kVA, transforming 347 Volts to 347 Volts

SKU: SC100E-E/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 100kVA, transforming 347 Volts to 347 Volts



OFFICIAL QUOTE



100VA 347 VOLTS TO 347 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	711 lbs
Phases	1
kVA	100
Connection	1Ph-2coil-5T-SU
Primary Voltage	347
Primary Max Current	288.18A
Primary Markings	H1-H2
Primary Terminals	<u>Pads</u>
Secondary Voltage	347
Secondary Max Current	288.18A
Secondary Markings	<u>X1-X2</u>
Secondary Terminals	<u>Pads</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	<u>Copper</u>
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	98.60% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	50
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-8S</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



100VA 347 VOLTS TO 347 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey