


#### **OFFICIAL QUOTE**

## 15KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



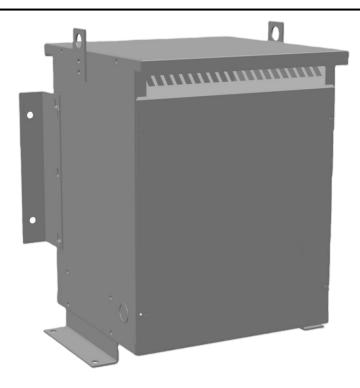

# 15KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$2,623.15 CAD


Single Phase Isolation Transformer with a capacity of 15kVA, transforming 110 Volts to 416 Volts

**SKU:** SC15A2-G/Z3

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 15kVA, transforming 110 Volts to 416 Volts



## **OFFICIAL QUOTE**



# 15KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

## **PRODUCT SPECIFICATIONS**

Weight	215 lbs
Phases	1
kVA	<u>15</u>
Connection	1Ph-2coil-5T-SU
Primary Voltage	110
Primary Max Current	<u>136.36A</u>
Primary Markings	<u>X1-X2</u>
Primary Terminals	300 MCM - 6
Secondary Voltage	416
Secondary Max Current	36.06A
Secondary Markings	<u>H1-H2</u>
Secondary Terminals	<u>300 MCM – 6</u>
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	97.70% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-4
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



## **OFFICIAL QUOTE**



# 15KVA 110 VOLTS TO 416 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey