


OFFICIAL QUOTE

15KVA 115 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER



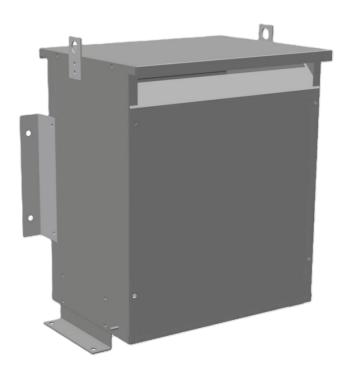

15KVA 115 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER

\$4,348.75 CAD


Three Phase Isolation Transformer with a capacity of 15kVA, transforming 115 Volts to 380Y/220 Volts

SKU: BC15A1-R/Z3

Categories: <u>Isolation Transformers</u>

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Three Phase Isolation Transformer with a capacity of 15kVA, transforming 115 Volts to 380Y/220 Volts



OFFICIAL QUOTE



15KVA 115 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS	
Weight	215 lbs
Phases	<u>3</u>
kVA	<u>15</u>
Connection	3Ph-DY-5T-SU
Primary Voltage	115
Primary Max Current	75.31A
Primary Markings	<u>X1-X2-X3</u>
Primary Terminals	#2/0-6 AWG
Secondary Voltage	380Y/220
Secondary Max Current	22.79A
Secondary Markings	<u>H0-H1-H2-H3</u>
Secondary Terminals	#2/0-6 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	Copper
BIL (Insulation) Level	<u>10kV</u>
Efficiency (@35% Load) %	97.70% (DOE 2016/NRCan 2019)
Impedance Range	4.0 - 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	<u>E3R-5</u>
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



15KVA 115 VOLTS TO 380Y/220 VOLTS THREE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey