


#### **OFFICIAL QUOTE**

## 15KVA 416 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



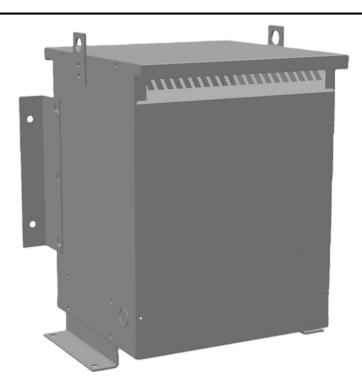

# 15KVA 416 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

\$2,472.93 CAD

Single Phase Isolation Transformer with a capacity of 15kVA, transforming 416 Volts to 120/240 Volts

**SKU:** SA15G-K/Z3

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 15kVA, transforming 416 Volts to 120/240 Volts



### **OFFICIAL QUOTE**



## 15KVA 416 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

#### PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS		
Weight	143 lbs	
Phases	1	
kVA	<u>15</u>	
Connection	1Ph-2coil-5t-SD	
Primary Voltage	416	
Primary Max Current	36.06A	
Primary Markings	H1-H2	
Primary Terminals	#2-14 AWG	
Secondary Voltage	120/240	
Secondary Max Current	125.0A	
Secondary Markings	<u>X1-X2</u>	
Secondary Terminals	#2-14 AWG	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	<u>Aluminum</u>	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	97.70% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	45	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	E3R-4	
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



### **OFFICIAL QUOTE**



## 15KVA 416 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey