




OFFICIAL QUOTE

15KVA 440 VOLTS TO 220Y/127
VOLTS THREE PHASE ISOLATION
TRANSFORMER

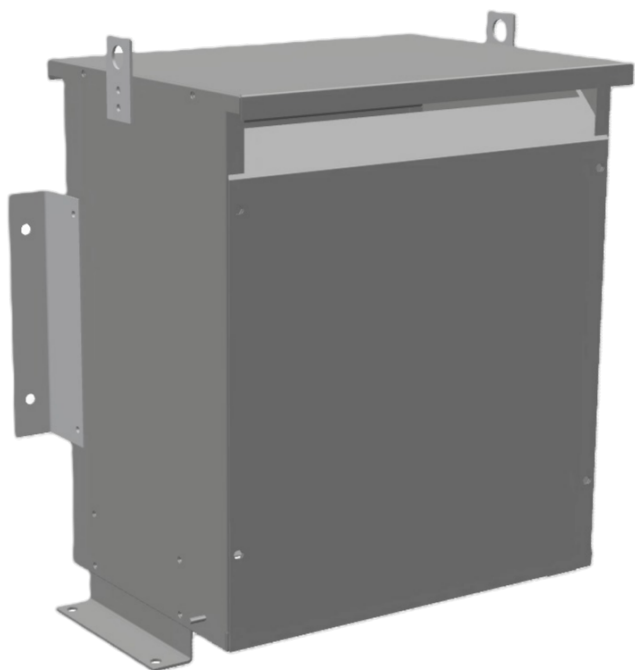

15KVA 440 VOLTS TO 220Y/127 VOLTS THREE PHASE ISOLATION TRANSFORMER



\$3,906.00 CAD

Three Phase Isolation Transformer with a capacity
of 15kVA, transforming 440 Volts to 220Y/127
Volts

SKU: BA15H2-S2/Z3

Categories: [Isolation Transformers](#)

SCHEMATIC/DIAGRAM AND DIMENSION PICTURES

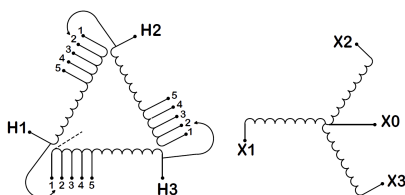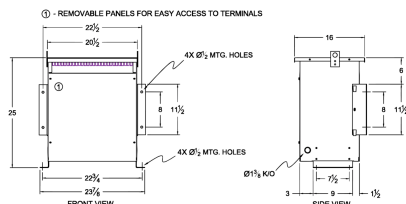

Three Phase Isolation Transformer with a capacity of 15kVA, transforming 440 Volts to 220Y/127 Volts



OFFICIAL QUOTE

15KVA 440 VOLTS TO 220Y/127 VOLTS THREE PHASE ISOLATION TRANSFORMER



PRODUCT SPECIFICATIONS

Weight	230 lbs
Phases	3
kVA	15
Connection	3Ph-DY-5T-SD
Primary Voltage	440
Primary Max Current	19.68A
Primary Markings	H1-H2-H3
Primary Terminals	#2-14 AWG
Secondary Voltage	220Y/127
Secondary Max Current	39.36A
Secondary Markings	X0-X1-X2-X3
Secondary Terminals	#2-14 AWG
Primary Taps	+/- 2 x 2.5%
Conductor Material	Aluminum
BIL (Insulation) Level	10kV
Efficiency (@35% Load) %	97.70% (DOE 2016/NRCan 2019)
Impedance Range	4.0 – 6.0%
Sound (db)	45
Enclosure Type	NEMA 3R Indoor
Enclosure Size	E3R-5
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered
Temperatue Rise	150°C



OFFICIAL QUOTE



**15KVA 440 VOLTS TO 220Y/127
VOLTS THREE PHASE ISOLATION
TRANSFORMER**

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey