


#### **OFFICIAL QUOTE**

## 15KVA 575 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER



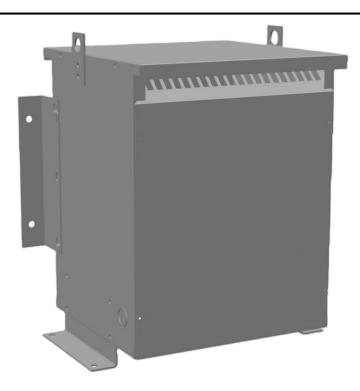

# 15KVA 575 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER


\$2,360.53 CAD


Single Phase Isolation Transformer with a capacity of 15kVA, transforming 575 Volts to 120/240 Volts

**SKU:** SA15J1-K/Z3

**Categories:** <u>Isolation Transformers</u>

#### SCHEMATIC/DIAGRAM AND DIMENSION PICTURES





Single Phase Isolation Transformer with a capacity of 15kVA, transforming 575 Volts to 120/240 Volts



#### **OFFICIAL QUOTE**



## 15KVA 575 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

### **PRODUCT SPECIFICATIONS**

PRODUCT SPECIFICATIONS		
Weight	143 lbs	
Phases	1	
kVA	15	
Connection	1Ph-2coil-5t-SD	
Primary Voltage	<u>575</u>	
Primary Max Current	26.09A	
Primary Markings	H1-H2	
Primary Terminals	#2-14 AWG	
Secondary Voltage	120/240	
Secondary Max Current	125.0A	
Secondary Markings	<u>X1-X2</u>	
Secondary Terminals	#2-14 AWG	
Primary Taps	+/- 2 x 2.5%	
Conductor Material	<u>Aluminum</u>	
BIL (Insulation) Level	<u>10kV</u>	
Efficiency (@35% Load) %	97.70% (DOE 2016/NRCan 2019)	
Impedance Range	4.0 - 6.0%	
Sound (db)	45	
Enclosure Type	NEMA 3R Indoor	
Enclosure Size	<u>E3R-4</u>	
Finish/Colour	Polyester Powder Coat – ANSI/ASA 61 Grey	
Standards & Certifications	CSA Certified File No. LR34493, UL Listed File No. E108255, ISO 9001:2015 Registered	
Temperatue Rise	150°C	



#### **OFFICIAL QUOTE**



## 15KVA 575 VOLTS TO 120/240 VOLTS SINGLE PHASE ISOLATION TRANSFORMER

Insuation Class	150°C
Country/Manufacturer	Canada/RPM
Finish/Colour	Polyester Powder Coat - ANSI/ASA 61 Grey